



SANY TOWER CRANE

Quality Changes the World

SANY

SANY TOWER CRANE



SYT80(T5710-6)
SYT80(T6011-6)
SYT80(T6011-6W)
SYT80(T6012-6)
SYT80(T6012-6F)
SYT80(T6012-6W)
SYT80(T6013-6)
SYT80(T6013-6F)
SYT80(T6510-6)
SYT80(T6510-6W)
SYT80(T6510-8)
SYT100(T6515-6)
SYT125(T6515-8)
SYT160(T7015-10)




TOWER CRANE

Integral Standard Section

SYT80 (T5710-6)


Jib Length & Tip Load

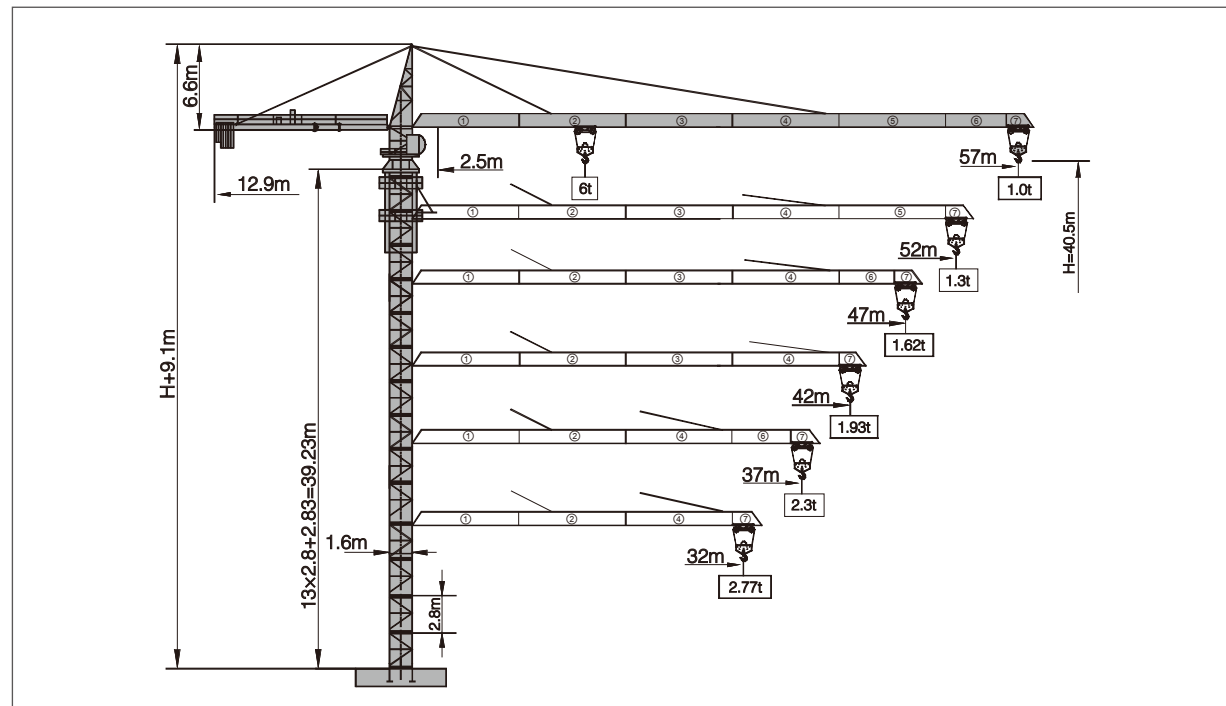


Counter-jib Ballast

Boom length (m)	Balance jib length(m)	Total weight of counterweight (kg)	2660kg counterweight (blocks)	1500kg counterweight (blocks)
57	12.9	13640	4	2
52	12.9	12140	4	1
47	12.9	12140	4	1
42	12.9	10980	3	2
37	12.9	8320	2	2
32	12.9	8320	2	2

Masts

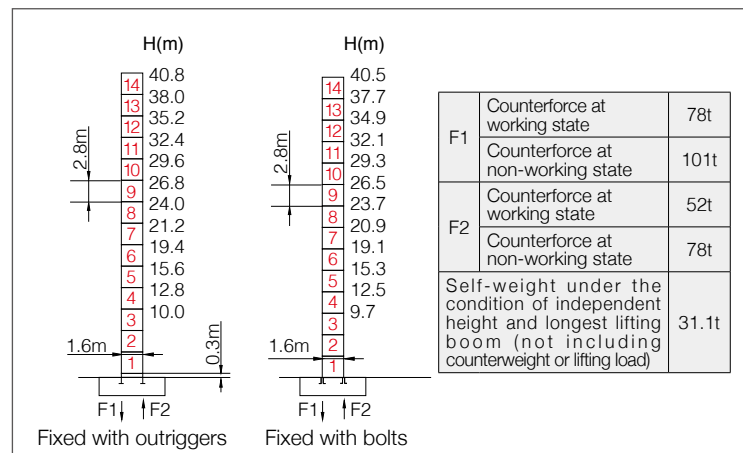

Anchorage

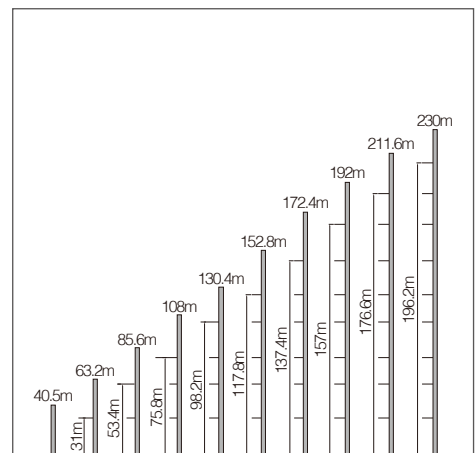


Load diagrams

Range	Max. lifting capacity	17	20	23	25	27	30	32	35	37
57m	2.5~25.7m/3t		3.00			2.82	2.47	2.27	2.02	1.88
	2.5~14.2m/6t	4.85	4.00	3.37	3.04	2.76	2.41	2.21	1.96	1.82
52m	2.5~27.7m/3t			3.00			2.72	2.51	2.24	2.08
	2.5~15.3m/6t	5.31	4.38	3.70	3.34	3.04	2.66	2.45	2.18	2.02
47m	2.5~29.2m/3t			3.00			2.90	2.68	2.39	2.23
	2.5~16.1m/6t	5.64	4.66	3.94	3.56	3.24	2.84	2.62	2.33	2.17
42m	2.5~29.7m/3t			3.00			2.96	2.73	2.44	2.27
	2.5~16.4m/6t	5.74	4.74	4.02	3.63	3.30	2.90	2.67	2.38	2.21
37m	2.5~29.9m/3t			3.00			2.99	2.76	2.47	2.30
	2.5~16.5m/6t	5.79	4.79	4.05	3.67	3.34	2.93	2.70	2.41	2.24
32m	2.5~30.0m/3t			3.00			2.77			
	2.5~16.5m/6t	5.81	4.80	4.07	3.68	3.35	2.94	2.71		

Range	Max. lifting capacity	40	42	45	47	50	52	55	57
57m	2.5~25.7m/3t	1.69	1.58	1.43	1.34	1.23	1.16	1.06	1.00
	2.5~14.2m/6t	1.63	1.52	1.37	1.28	1.17	1.10	1.00	0.94
52m	2.5~27.7m/3t	1.88	1.76	1.60	1.50	1.38	1.30		
	2.5~15.3m/6t	1.82	1.70	1.54	1.44	1.32	1.24		
47m	2.5~29.2m/3t	2.01	1.89	1.72	1.62				
	2.5~16.1m/6t	1.95	1.83	1.66	1.56				
42m	2.5~29.7m/3t	2.05	1.93						
	2.5~16.4m/6t	1.99	1.87						

Load Capacity Diagram

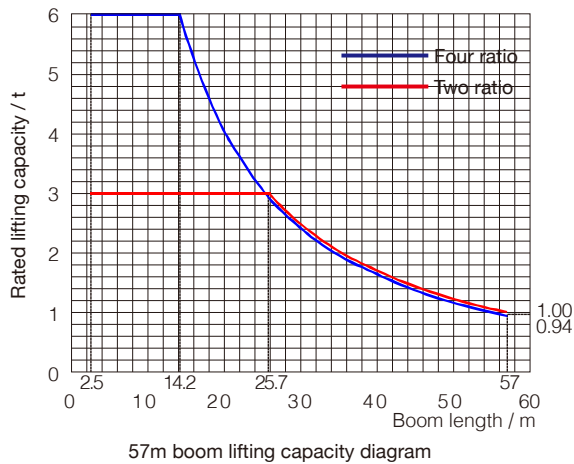

Mechanisms


		Model	Power	Speed
Slewing	↻	SHJ120A7.5R	1×7.5kW	0 ~ 0.7r/min
Trolleying	↔	SXJ33.62B	3.3/2.2kW	50/25m/min
Lifting	↑↓	SQJ03N	24/24/5.4kW	1.5t 80m/min 3t 40m/min 3t 8.8m/min 3t 40m/min 6t 20m/min 6t 4.4m/min
Power voltage		380V(±10%)	Power frequency	50Hz

Note: If working rope capacity is greater than 380m, please contact the manufacturer.

Integral Standard Section

SYT80 (T6011-6)


Jib Length & Tip Load

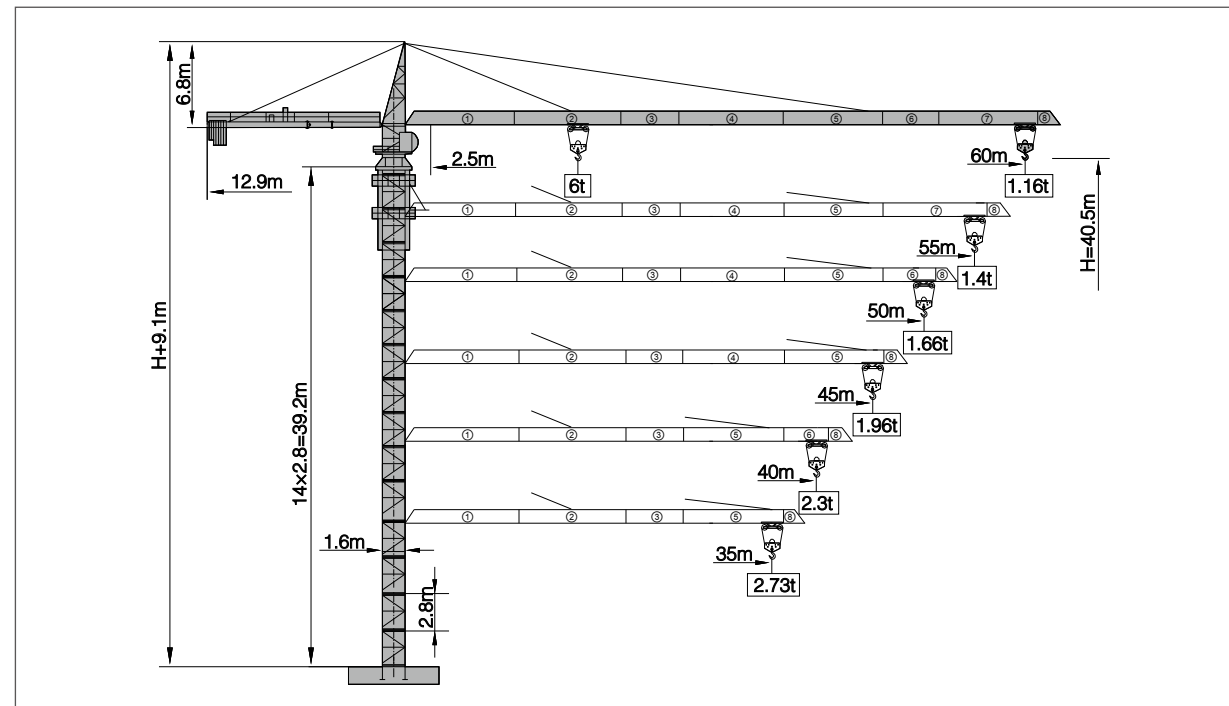


Counter-jib Ballast

Boom length (m)	Balance jib length(m)	Total weight of counterweight (kg)	2660kg counterweight (blocks)	1500kg counterweight (blocks)
60	12.9	16300	5	2
55	12.9	14800	5	1
50	12.9	13300	5	0
45	12.9	12140	4	1
40	12.9	9480	3	1
35	12.9	7980	3	0

Masts

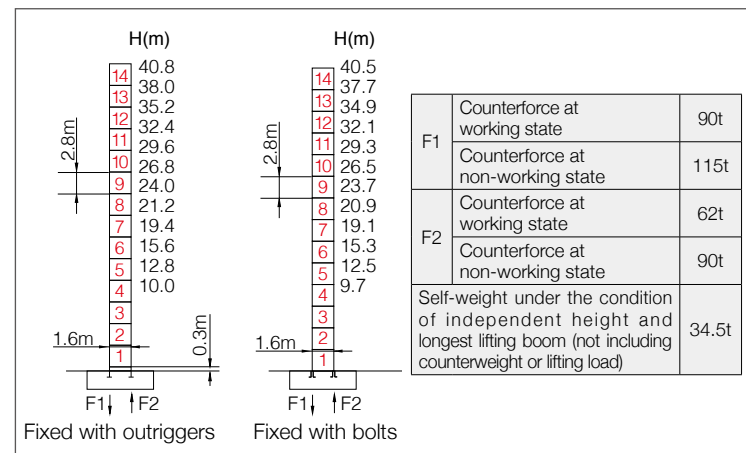

Anchorage

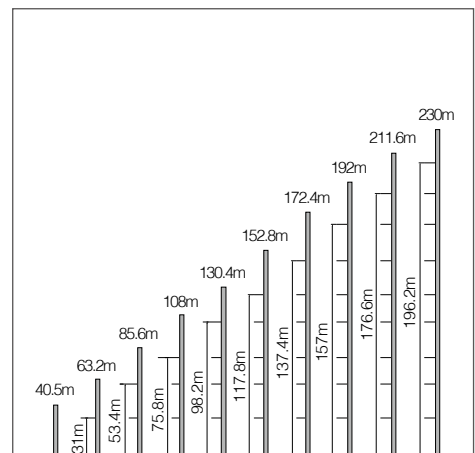


Load diagrams

Range	Max. lifting capacity	17	20	23	26	29	32	35	38	40
60m	2.5~29.5m/3t			3.00			2.77	2.48	2.23	2.08
	2.5~16.3m/6t	5.81	4.80	4.07	3.51	3.07	2.71	2.42	2.17	2.02
55m	2.5~30.7m/3t			3.00			2.86	2.56	2.31	2.16
	2.5~16.9m/6t	5.99	4.96	4.20	3.63	3.17	2.80	2.50	2.25	2.10
50m	2.5~31.5m/3t			3.00			2.96	2.65	2.38	2.23
	2.5~17.3m/6t	6.00	5.11	4.33	3.74	3.27	2.90	2.59	2.32	2.17
45m	2.5~32.1m/3t			3.00				2.70	2.44	2.28
	2.5~17.6m/6t	6.00	5.21	4.42	3.82	3.34	2.96	2.64	2.38	2.22
40m	2.5~32.3m/3t			3.00				2.72	2.46	2.30
	2.5~17.7m/6t	6.00	5.24	4.45	3.84	3.37	2.98	2.66	2.40	2.24
35m	2.5~32.4m/3t			3.00				2.73		
	2.5~17.8m/6t	6.00	5.26	4.46	3.85	3.38	2.99	2.67		

Range	Max. lifting capacity	41	45	47	50	53	55	56	60
60m	2.5~29.5m/3t	2.02	1.78	1.68	1.54	1.42	1.35	1.31	1.16
	2.5~16.3m/6t	1.96	1.72	1.62	1.48	1.36	1.29	1.25	1.10
55m	2.5~30.7m/3t	2.09	1.85	1.74	1.60	1.48	1.40		
	2.5~16.9m/6t	2.03	1.79	1.68	1.54	1.42	1.34		
50m	2.5~31.5m/3t	2.16	1.91	1.81	1.66				
	2.5~17.3m/6t	2.10	1.85	1.75	1.60				
45m	2.5~32.1m/3t	2.21	1.96						
	2.5~17.6m/6t	2.15	1.90						

Load Capacity Diagram

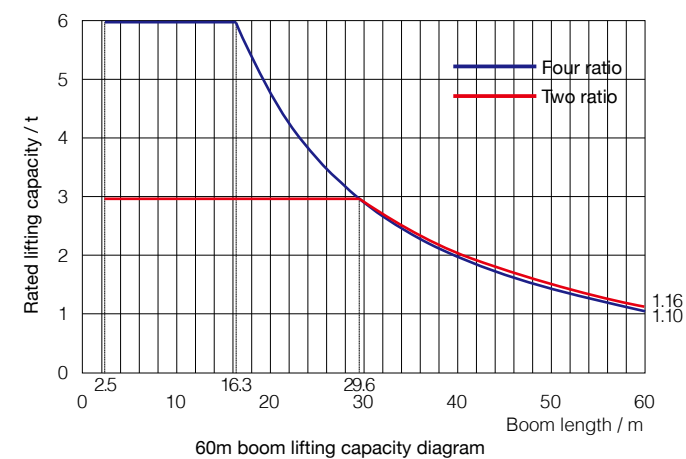

Mechanisms


		Model	Power	Speed
Slewing	↻	SHJ100A3	2×4kW	0~0.8r/min
Trolleying	↔	SXJ33.62B	3.3/2.2kW	50 / 25m/min
Lifting	↑↓	SQJ03N	24/24/5.4 kW	1.5t 80m/min 3t 40m/min 3t 8.8m/min 3t 40m/min 6t 20m/min 6t 4.4m/min
Power voltage		380V(±10%)	Power frequency	50Hz

Note: If working rope capacity is greater than 380m, please contact the manufacturer.

Integral Standard Section

SYT80 (T6011-6W)


Jib Length & Tip Load

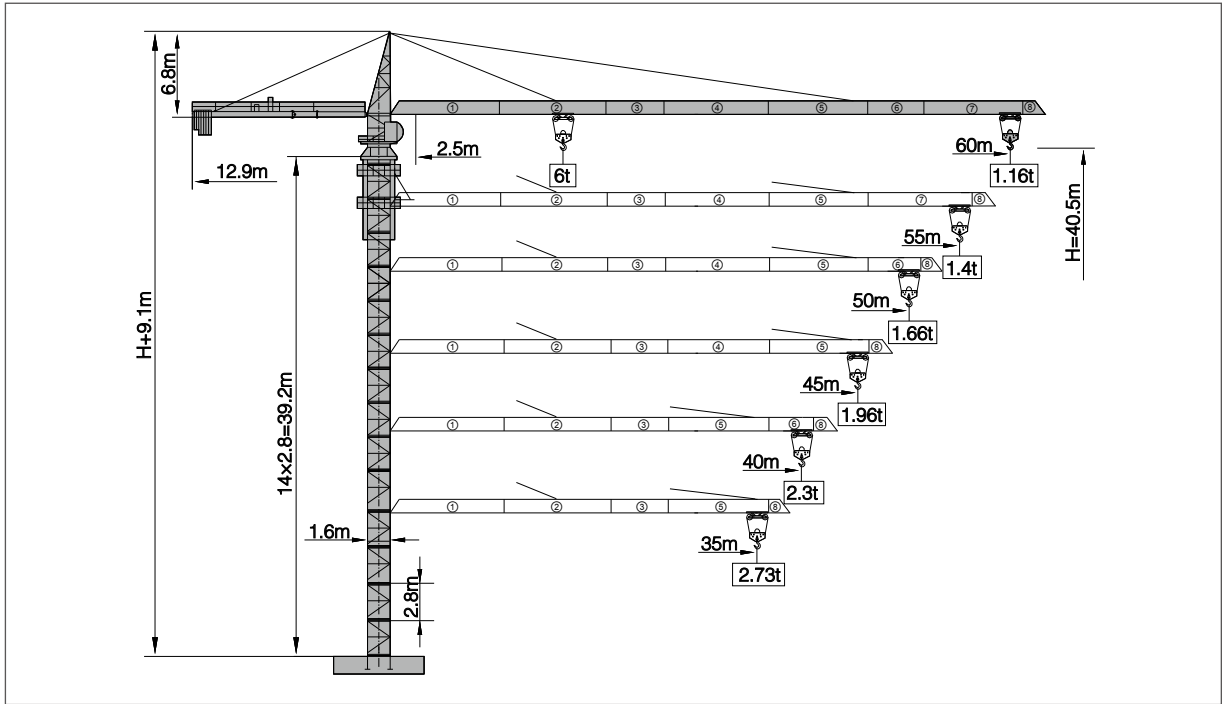


Counter-jib Ballast

Boom length (m)	Balance jib length(m)	Total weight of counterweight (kg)	2660kg counterweight (blocks)	1500kg counterweight (blocks)
60	12.9	16300	5	2
55	12.9	14800	5	1
50	12.9	13300	5	0
45	12.9	12140	4	1
40	12.9	9480	3	1
35	12.9	7980	3	0

Masts

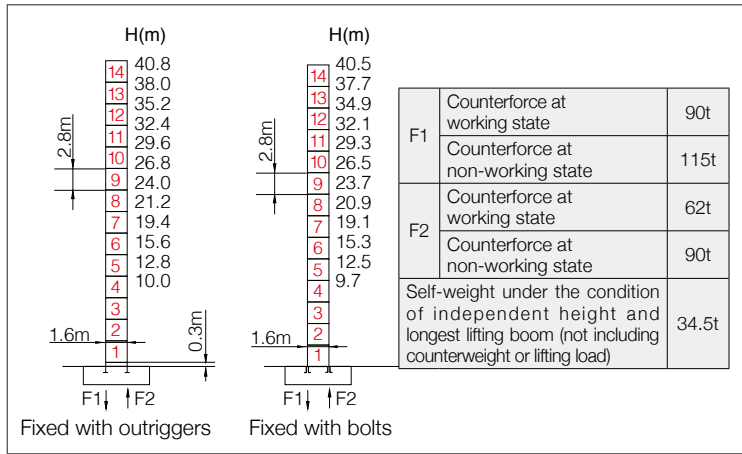

Anchorage

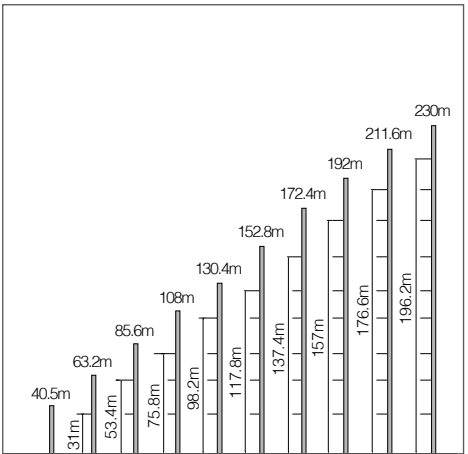


Load diagrams

Range	Max. lifting capacity	17	20	23	26	29	32	35	38	40
60m	2.5~29.5m/3t			3.00			2.77	2.48	2.23	2.08
	2.5~16.3m/6t	5.81	4.80	4.07	3.51	3.07	2.71	2.42	2.17	2.02
55m	2.5~30.7m/3t			3.00			2.86	2.56	2.31	2.16
	2.5~16.9m/6t	5.99	4.96	4.20	3.63	3.17	2.80	2.50	2.25	2.10
50m	2.5~31.5m/3t			3.00			2.96	2.65	2.38	2.23
	2.5~17.3m/6t	6.00	5.11	4.33	3.74	3.27	2.90	2.59	2.32	2.17
45m	2.5~32.1m/3t			3.00				2.70	2.44	2.28
	2.5~17.6m/6t	6.00	5.21	4.42	3.82	3.34	2.96	2.64	2.38	2.22
40m	2.5~32.3m/3t			3.00				2.72	2.46	2.30
	2.5~17.7m/6t	6.00	5.24	4.45	3.84	3.37	2.98	2.66	2.40	2.24
35m	2.5~32.4m/3t			3.00				2.73		
	2.5~17.8m/6t	6.00	5.26	4.46	3.85	3.38	2.99	2.67		

Range	Max. lifting capacity	41	45	47	50	53	55	56	60
60m	2.5~29.5m/3t	2.02	1.78	1.68	1.54	1.42	1.35	1.31	1.16
	2.5~16.3m/6t	1.96	1.72	1.62	1.48	1.36	1.29	1.25	1.10
55m	2.5~30.7m/3t	2.09	1.85	1.74	1.60	1.48	1.40		
	2.5~16.9m/6t	2.03	1.79	1.68	1.54	1.42	1.34		
50m	2.5~31.5m/3t	2.16	1.91	1.81	1.66				
	2.5~17.3m/6t	2.10	1.85	1.75	1.60				
45m	2.5~32.1m/3t	2.21	1.96						
	2.5~17.6m/6t	2.15	1.90						

Load Capacity Diagram

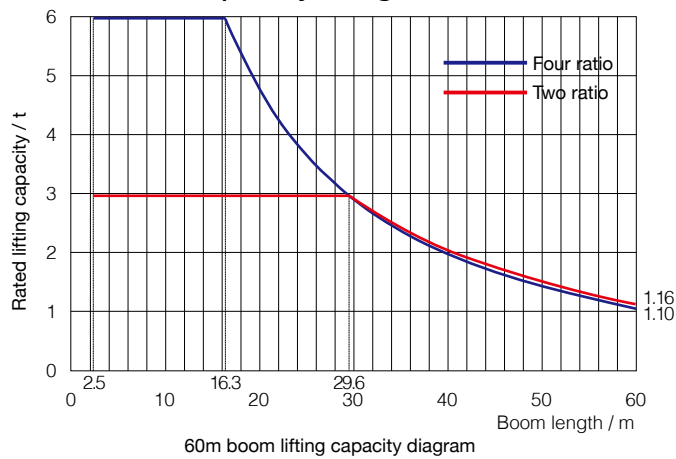

Mechanisms


		Model	Power	Speed
Slewing	↻	SHJ100A3	2×4kW	0~0.8r/min
Trolleying	↔	SXJ33.62B	3.3/2.2kW	50/25m/min
Lifting	↑↓	SQJ03NR	24/24kW	1.5t 80m/min 3t 40m/min 3t 40m/min 6t 20m/min
Power voltage		380V(±10%)	Power frequency	50Hz

Note: If working rope capacity is greater than 380m, please contact the manufacturer.

Integral Standard Section

SYT80 (T6012-6)


Jib Length & Tip Load

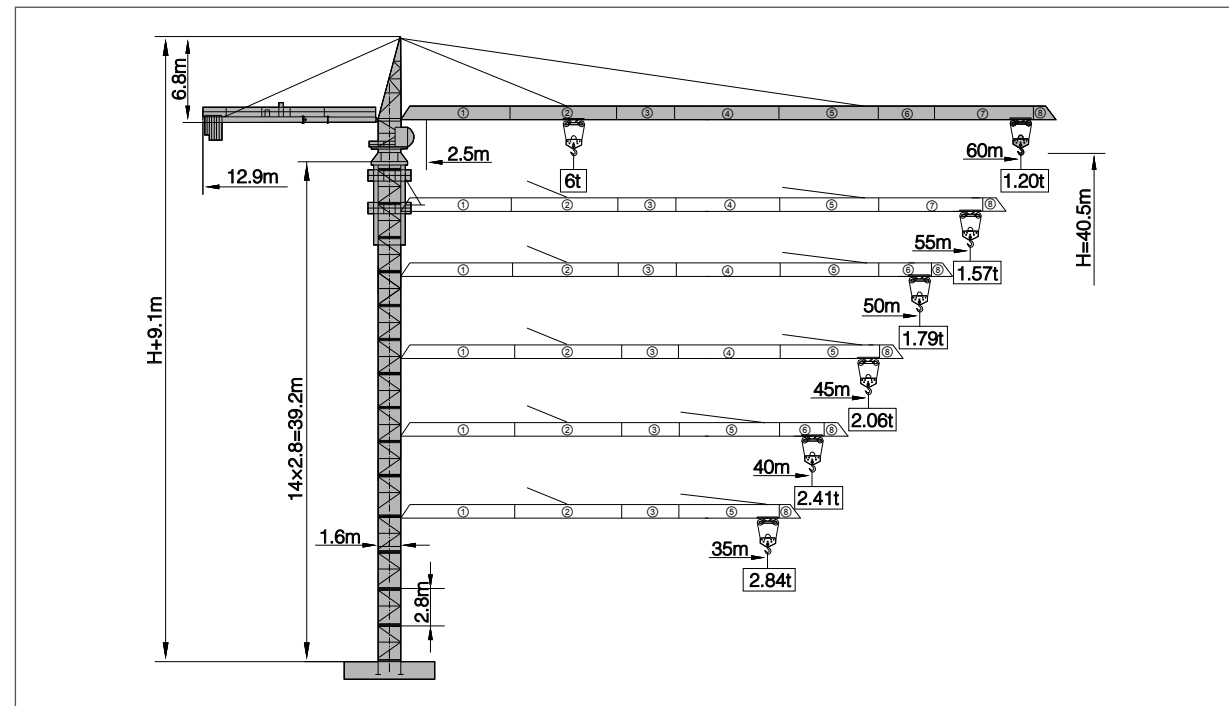


Counter-jib Ballast

Boom length (m)	Balance jib length(m)	Total weight of counterweight (kg)	2660kg counterweight (blocks)	1500kg counterweight (blocks)
60	12.9	16300	5	2
55	12.9	14800	5	1
50	12.9	13300	5	0
45	12.9	12140	4	1
40	12.9	9480	3	1
35	12.9	7980	3	0

Masts

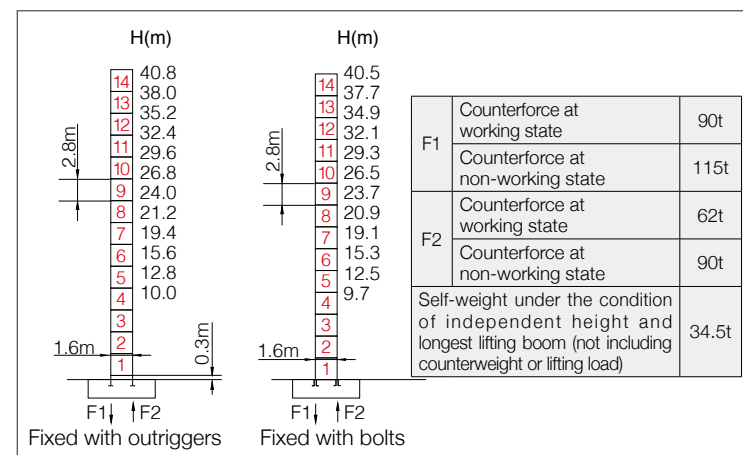

Anchorage

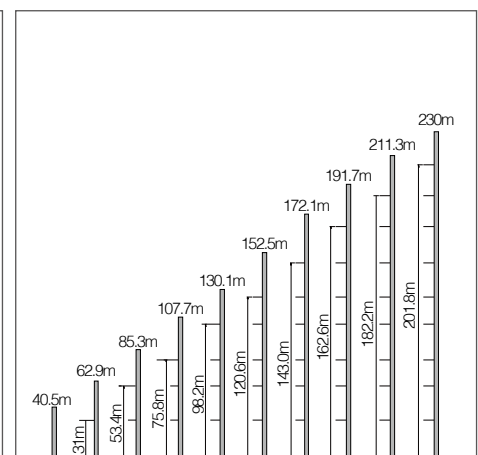


Load diagrams

Range	Max. lifting capacity	18	20	22	25	28	30	32	35	38
60m	2.5~30.5m/3t				3.00			2.81	2.51	2.26
	2.5~16.8m/6t	5.51	4.87	4.35	3.73	3.25	2.98	2.75	2.45	2.20
55m	2.5~33.3m/3t				3.00				2.83	2.55
	2.5~18.4m/6t	6.00	5.43	4.85	4.17	3.64	3.35	3.09	2.77	2.49
50m	2.5~33.3m/3t				3.00				2.83	2.56
	2.5~18.4m/6t	6.00	5.44	4.86	4.18	3.65	3.36	3.10	2.77	2.50
45m	2.5~33.3m/3t				3.00				2.84	2.56
	2.5~18.4m/6t	6.00	5.45	4.87	4.19	3.66	3.36	3.11	2.78	2.50
40m	2.5~33.3m/3t				3.00				2.84	2.57
	2.5~18.4m/6t	6.00	5.46	4.88	4.20	3.66	3.37	3.11	2.78	2.51
35m	2.5~33.3m/3t				3.00				2.84	
	2.5~18.4m/6t	6.00	5.46	4.88	4.20	3.66	3.37	3.11	2.78	

Range	Max. lifting capacity	40	42	45	48	50	52	55	57	60
60m	2.5~30.5m/3t	2.12	1.99	1.81	1.66	1.57	1.48	1.37	1.30	1.20
	2.5~16.8m/6t	2.06	1.93	1.75	1.60	1.51	1.42	1.31	1.24	1.14
55m	2.5~33.3m/3t	2.39	2.25	2.05	1.89	1.79	1.69	1.57		
	2.5~18.4m/6t	2.33	2.19	1.99	1.83	1.73	1.63	1.51		
50m	2.5~33.3m/3t	2.40	2.25	2.06	1.89	1.79				
	2.5~18.4m/6t	2.34	2.19	2.00	1.83	1.73				
45m	2.5~33.3m/3t	2.40	2.26	2.06						
	2.5~18.4m/6t	2.34	2.20	2.00						
40m	2.5~33.3m/3t	2.41								
	2.5~18.4m/6t	2.35								

Load Capacity Diagram

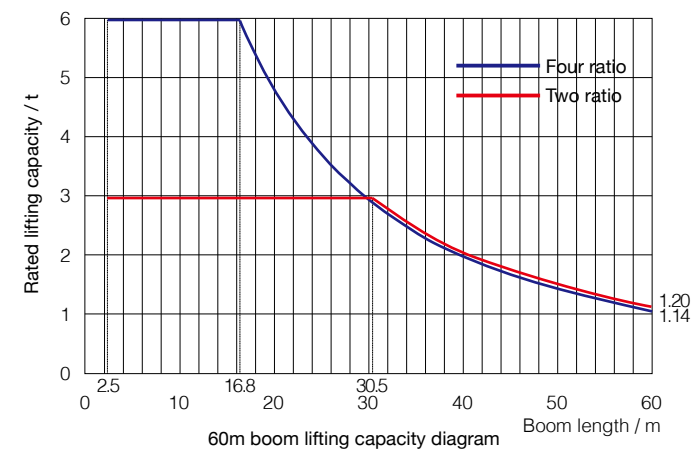

Mechanisms


		Model	Power	Speed
Slewing	↻	SHJ100A3	2×4kW	0~0.8r/min
Trolleying	↔	SXJ33.62B	3.3/2.2kW	50/25m/min
Lifting	↑↓	SQJ03N	24/24/5.4 kW	1.5t 80m/min 3t 40m/min 3t 8.8m/min 3t 40m/min 6t 20m/min 6t 4.4m/min
Power voltage		380V(±10%)	Power frequency	50Hz

Note: If working rope capacity is greater than 380m, please contact the manufacturer.

Integral Standard Section

SYT80 (T6012-6F)


Jib Length & Tip Load

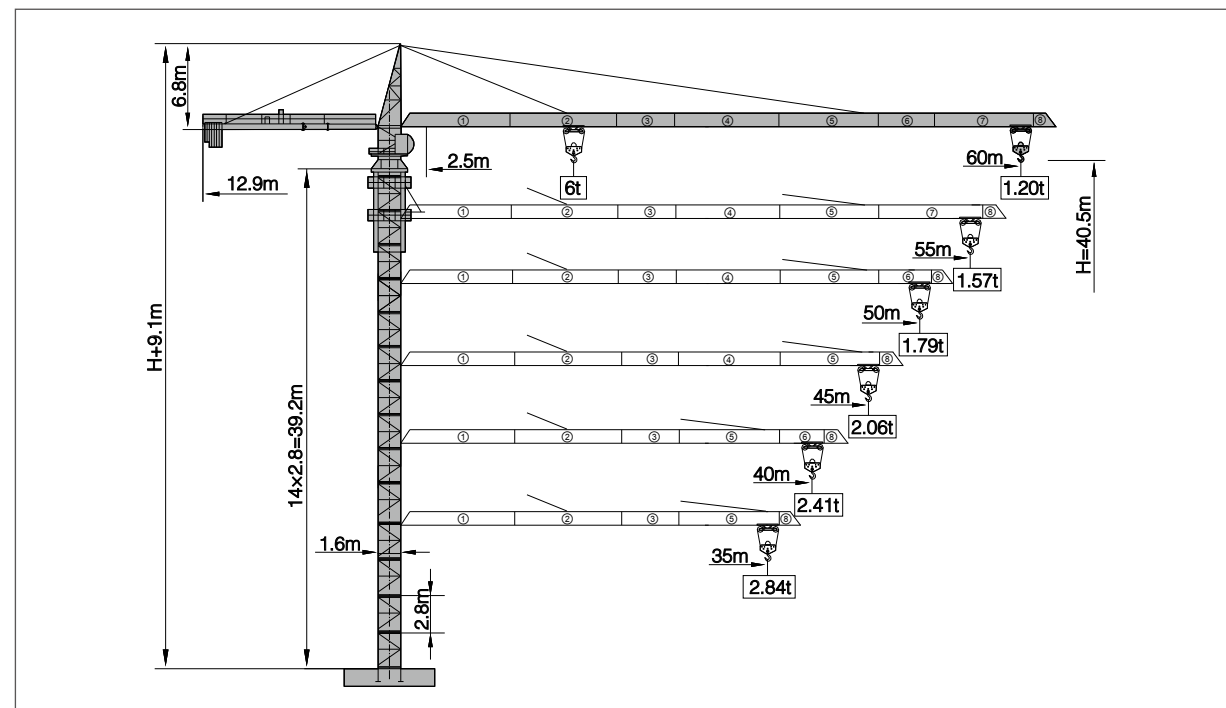


Counter-jib Ballast

Boom length (m)	Balance jib length(m)	Total weight of counterweight (kg)	2660kg counterweight (blocks)	1500kg counterweight (blocks)
60	12.9	16300	5	2
55	12.9	14800	5	1
50	12.9	13300	5	0
45	12.9	12140	4	1
40	12.9	9480	3	1
35	12.9	7980	3	0

Masts

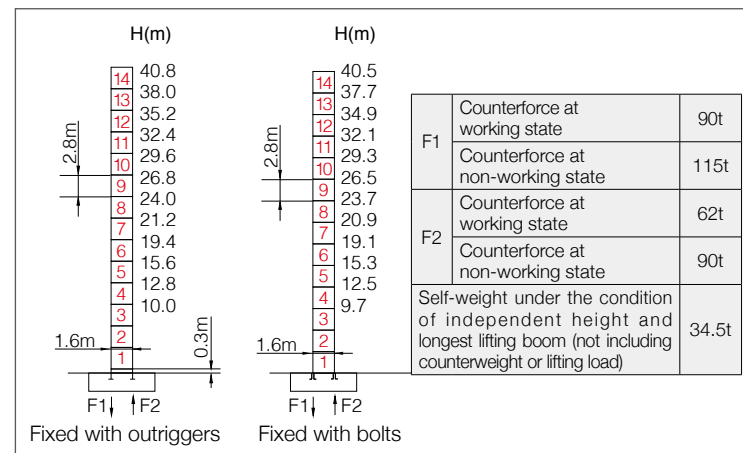

Anchorage

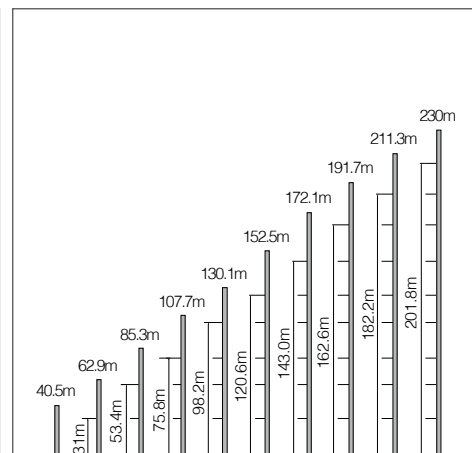


Load diagrams

Range	Max. lifting capacity	18	20	22	25	28	30	32	35	38
60m	2.5~30.5m/3t				3.00			2.81	2.51	2.26
	2.5~16.8m/6t	5.51	4.87	4.35	3.73	3.25	2.98	2.75	2.45	2.20
55m	2.5~33.3m/3t				3.00				2.83	2.55
	2.5~18.4m/6t	6.00	5.43	4.85	4.17	3.64	3.35	3.09	2.77	2.49
50m	2.5~33.3m/3t				3.00				2.83	2.56
	2.5~18.4m/6t	6.00	5.44	4.86	4.18	3.65	3.36	3.10	2.77	2.50
45m	2.5~33.3m/3t				3.00				2.84	2.56
	2.5~18.4m/6t	6.00	5.45	4.87	4.19	3.66	3.36	3.11	2.78	2.50
40m	2.5~33.3m/3t				3.00				2.84	2.57
	2.5~18.4m/6t	6.00	5.46	4.88	4.20	3.66	3.37	3.11	2.78	2.51
35m	2.5~33.3m/3t				3.00				2.84	
	2.5~18.4m/6t	6.00	5.46	4.88	4.20	3.66	3.37	3.11	2.78	

Range	Max. lifting capacity	40	42	45	48	50	52	55	57	60
60m	2.5~30.5m/3t	2.12	1.99	1.81	1.66	1.57	1.48	1.37	1.30	1.20
	2.5~16.8m/6t	2.06	1.93	1.75	1.60	1.51	1.42	1.31	1.24	1.14
55m	2.5~33.3m/3t	2.39	2.25	2.05	1.89	1.79	1.69	1.57		
	2.5~18.4m/6t	2.33	2.19	1.99	1.83	1.73	1.63	1.51		
50m	2.5~33.3m/3t	2.40	2.25	2.06	1.89	1.79				
	2.5~18.4m/6t	2.34	2.19	2.00	1.83	1.73				
45m	2.5~33.3m/3t	2.40	2.26	2.06						
	2.5~18.4m/6t	2.34	2.20	2.00						
40m	2.5~33.3m/3t	2.41								
	2.5~18.4m/6t	2.35								

Load Capacity Diagram

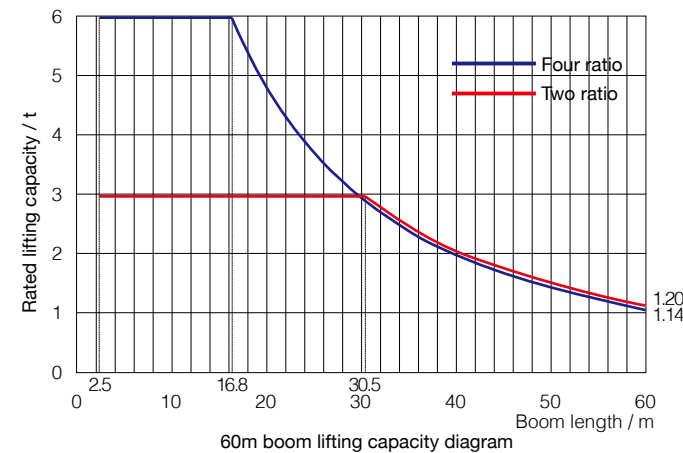

Mechanisms


		Model	Power	Speed
Slewing	↻	SHJ100A3	2×4kW	0~0.8r/min
Trolleying	↔	SXJ33.62P	4kW	0~50m/min
Lifting	↑↓	SQJ03NP	25kW	0~80m/min
Power voltage	↕	380V(±10%)	Power frequency	50Hz

Note: If working rope capacity is greater than 380m, please contact the manufacturer.

Integral Standard Section

SYT80 (T6012-6W)


Jib Length & Tip Load

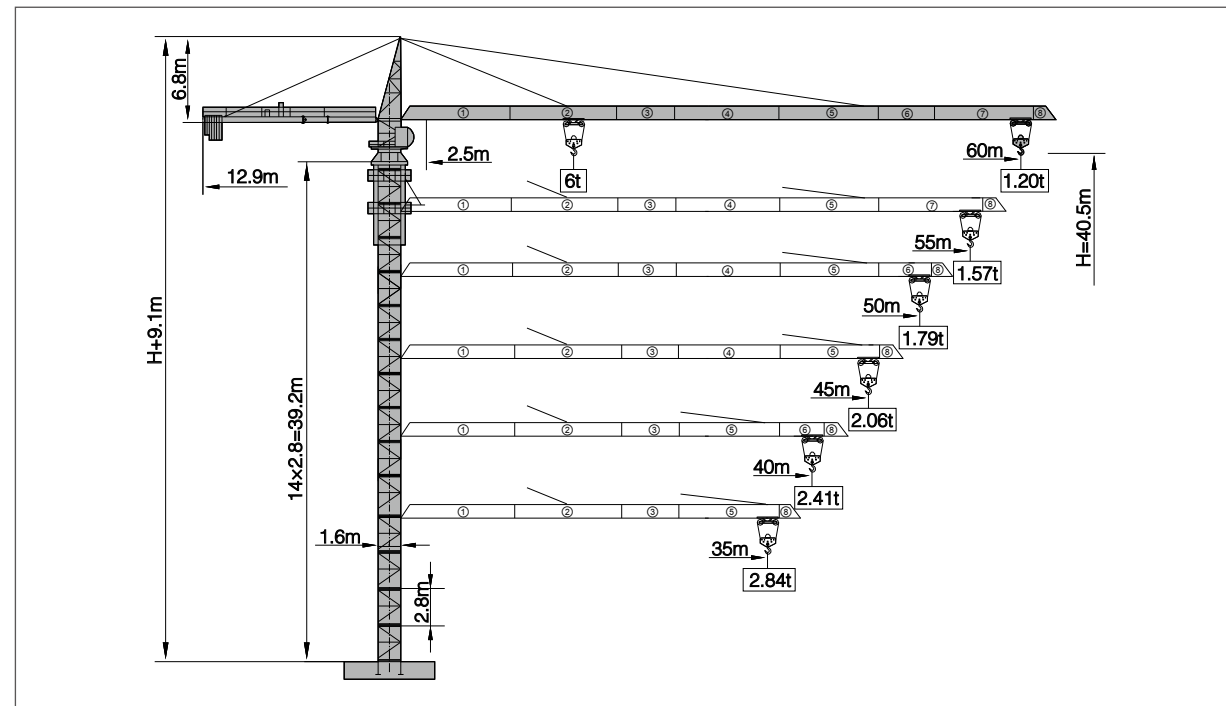


Counter-jib Ballast

Boom length (m)	Balance jib length(m)	Total weight of counterweight (kg)	2660kg counterweight (blocks)	1500kg counterweight (blocks)
60	12.9	16300	5	2
55	12.9	14800	5	1
50	12.9	13300	5	0
45	12.9	12140	4	1
40	12.9	9480	3	1
35	12.9	7980	3	0

Masts

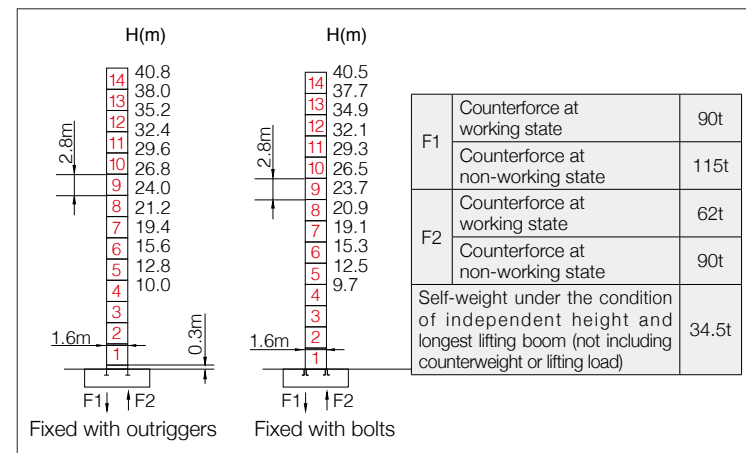

Anchorage

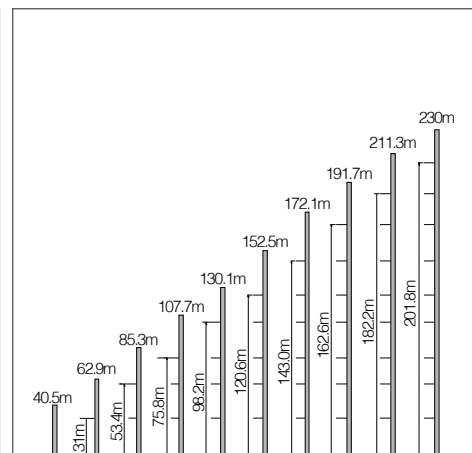


Load diagrams

Range	Max. lifting capacity	18	20	22	25	28	30	32	35	38
60m	2.5~30.5m/3t				3.00			2.81	2.51	2.26
	2.5~16.8m/6t	5.51	4.87	4.35	3.73	3.25	2.98	2.75	2.45	2.20
55m	2.5~33.3m/3t				3.00				2.83	2.55
	2.5~18.4m/6t	6.00	5.43	4.85	4.17	3.64	3.35	3.09	2.77	2.49
50m	2.5~33.3m/3t				3.00				2.83	2.56
	2.5~18.4m/6t	6.00	5.44	4.86	4.18	3.65	3.36	3.10	2.77	2.50
45m	2.5~33.3m/3t				3.00				2.84	2.56
	2.5~18.4m/6t	6.00	5.45	4.87	4.19	3.66	3.36	3.11	2.78	2.50
40m	2.5~33.3m/3t				3.00				2.84	2.57
	2.5~18.4m/6t	6.00	5.46	4.88	4.20	3.66	3.37	3.11	2.78	2.51
35m	2.5~33.3m/3t				3.00				2.84	
	2.5~18.4m/6t	6.00	5.46	4.88	4.20	3.66	3.37	3.11	2.78	

Range	Max. lifting capacity	40	42	45	48	50	52	55	57	60
60m	2.5~30.5m/3t	2.12	1.99	1.81	1.66	1.57	1.48	1.37	1.30	1.20
	2.5~16.8m/6t	2.06	1.93	1.75	1.60	1.51	1.42	1.31	1.24	1.14
55m	2.5~33.3m/3t	2.39	2.25	2.05	1.89	1.79	1.69	1.57		
	2.5~18.4m/6t	2.33	2.19	1.99	1.83	1.73	1.63	1.51		
50m	2.5~33.3m/3t	2.40	2.25	2.06	1.89	1.79				
	2.5~18.4m/6t	2.34	2.19	2.00	1.83	1.73				
45m	2.5~33.3m/3t	2.40	2.26	2.06						
	2.5~18.4m/6t	2.34	2.20	2.00						
40m	2.5~33.3m/3t	2.41								
	2.5~18.4m/6t	2.35								

Load Capacity Diagram

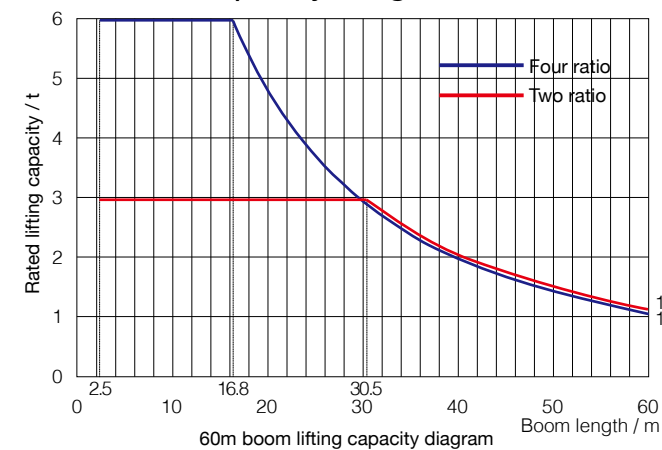

Mechanisms


		Model	Power	Speed
Slewing	↻	SHJ100A3	2×4kW	0~0.8r/min
Trolleying	↔	SXJ33.62B	3.3/2.2kW	50/25m/min
Lifting	↑↓	SQJ03NR	24/24kW	1.5t 80m/min 3t 40m/min 3t 40m/min 6t 20m/min
Power voltage		380V(±10%)	Power frequency	50Hz

Note: If working rope capacity is greater than 380m, please contact the manufacturer.

Integral Standard Section

SYT80 (T6013-6)


Jib Length & Tip Load

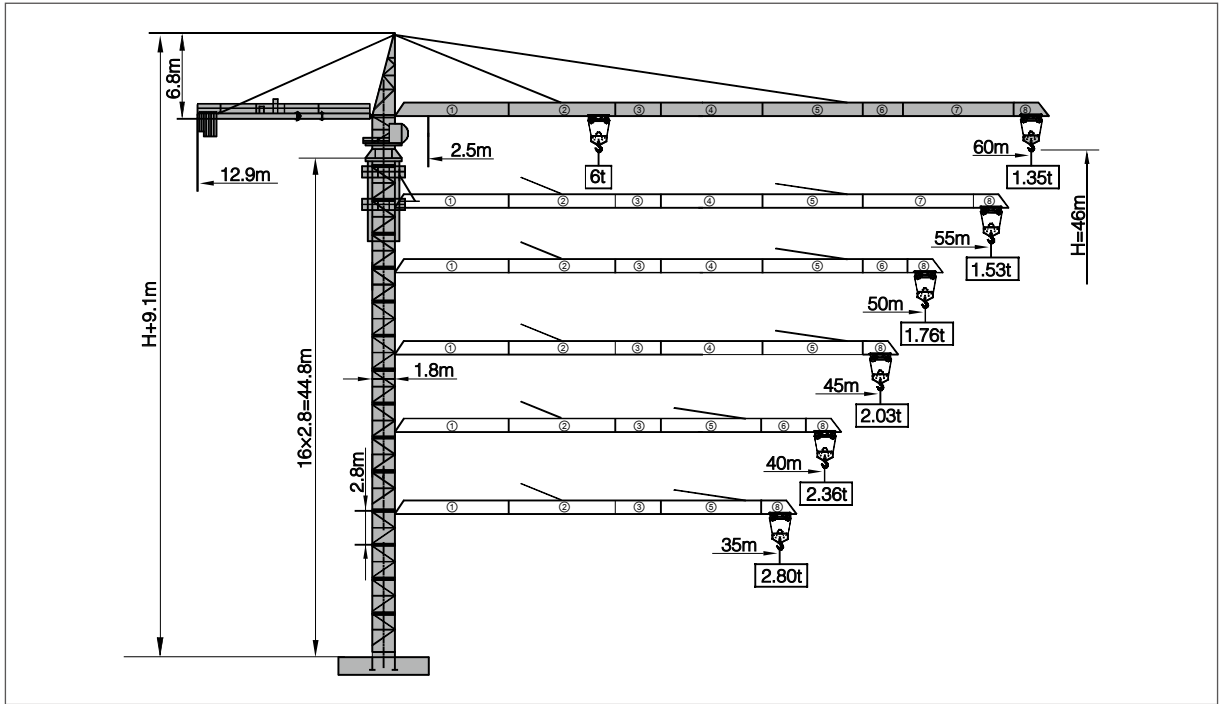


Counter-jib Ballast

Boom length (m)	Balance jib length(m)	Total weight of counterweight (kg)	2720kg counterweight (blocks)	1200kg counterweight (blocks)
60	12.9	17520	6	1
55	12.9	16320	6	0
50	12.9	14800	5	1
45	12.9	13600	5	0
40	12.9	10880	4	0
35	12.9	9360	3	1

Masts

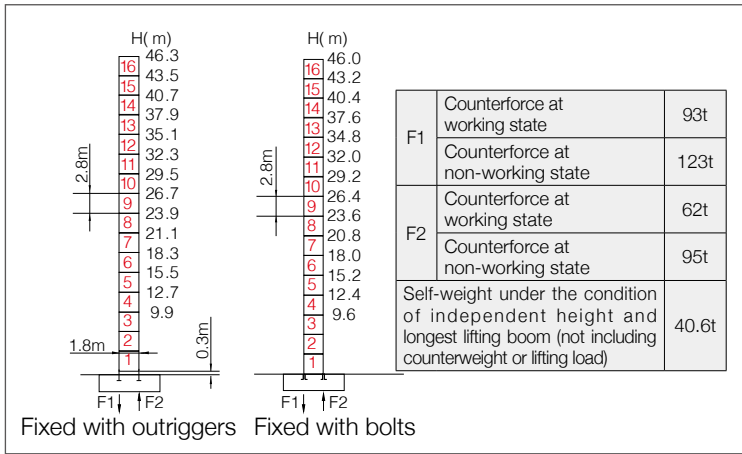

Anchorage

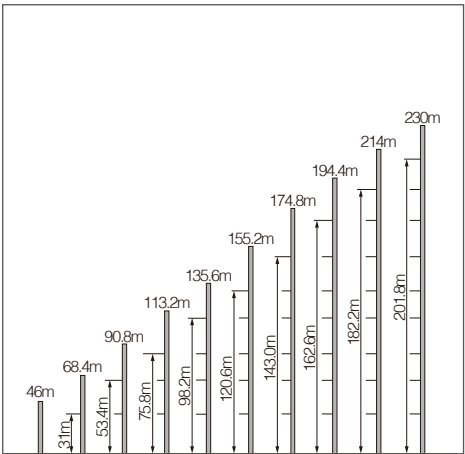


Load diagrams

Range	Max. lifting capacity	18	20	22	25	28	30	32	35	38
60m	2.5~32.8m/3t				3.00				2.77	2.50
	2.5~18.0m/6t	6.00	5.32	4.76	4.09	3.57	3.28	3.03	2.71	2.44
55m	2.5~32.9m/3t				3.00				2.78	2.51
	2.5~18.1m/6t	6.00	5.34	4.78	4.10	3.58	3.29	3.04	2.71	2.44
50m	2.5~33.0m/3t				3.00				2.79	2.51
	2.5~18.1m/6t	6.00	5.35	4.79	4.11	3.59	3.30	3.04	2.72	2.44
45m	2.5~33.0m/3t				3.00				2.79	2.52
	2.5~18.2m/6t	6.00	5.36	4.80	4.12	3.59	3.30	3.05	2.72	2.45
40m	2.5~33.0m/3t				3.00				2.79	2.52
	2.5~18.2m/6t	6.00	5.36	4.80	4.12	3.59	3.30	3.05	2.72	2.45
35m	2.5~33.1m/3t				3.00				2.80	
	2.5~18.2m/6t	6.00	5.38	4.81	4.13	3.60	3.31	3.05	2.73	

Range	Max. lifting capacity	40	42	45	48	50	52	55	58	60
60m	2.5~32.8m/3t	2.34	2.20	2.01	1.84	1.74	1.65	1.53	1.42	1.35
	2.5~18.0m/6t	2.28	2.14	1.95	1.78	1.68	1.59	1.47	1.36	1.29
55m	2.5~32.9m/3t	2.35	2.21	2.02	1.85	1.75	1.66	1.53		
	2.5~18.1m/6t	2.28	2.14	1.95	1.78	1.68	1.59	1.46		
50m	2.5~33.0m/3t	2.36	2.21	2.02	1.85	1.76				
	2.5~18.1m/6t	2.29	2.14	1.95	1.78	1.69				
45m	2.5~33.0m/3t	2.36	2.22	2.03						
	2.5~18.2m/6t	2.29	2.15	1.96						
40m	2.5~33.0m/3t	2.36								
	2.5~18.2m/6t	2.29								

Load Capacity Diagram

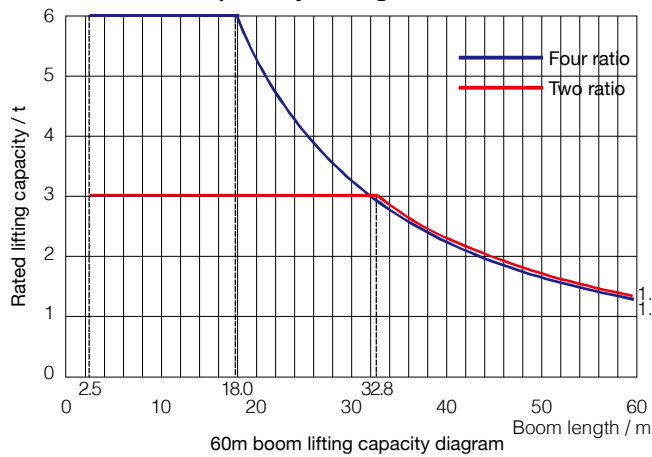

Mechanisms


		Model	Power	Speed
Slewing	↻	SHJ100A	2x5.5kW	0~0.75r/min
Trolleying	↔	SXJ33.62B	3.3/2.2kW	50/25m/min
Lifting	↑↓	SQJ03N	24/24/5.4kW	1.5t 80m/min 3t 40m/min 3t 8.8m/min 3t 40m/min 6t 20m/min 6t 4.4m/min
Power voltage		380V(±10%)	Power frequency	50Hz

Note: If working rope capacity is greater than 380m, please contact the manufacturer.

Integral Standard Section

SYT80 (T6013-6F)


Jib Length & Tip Load

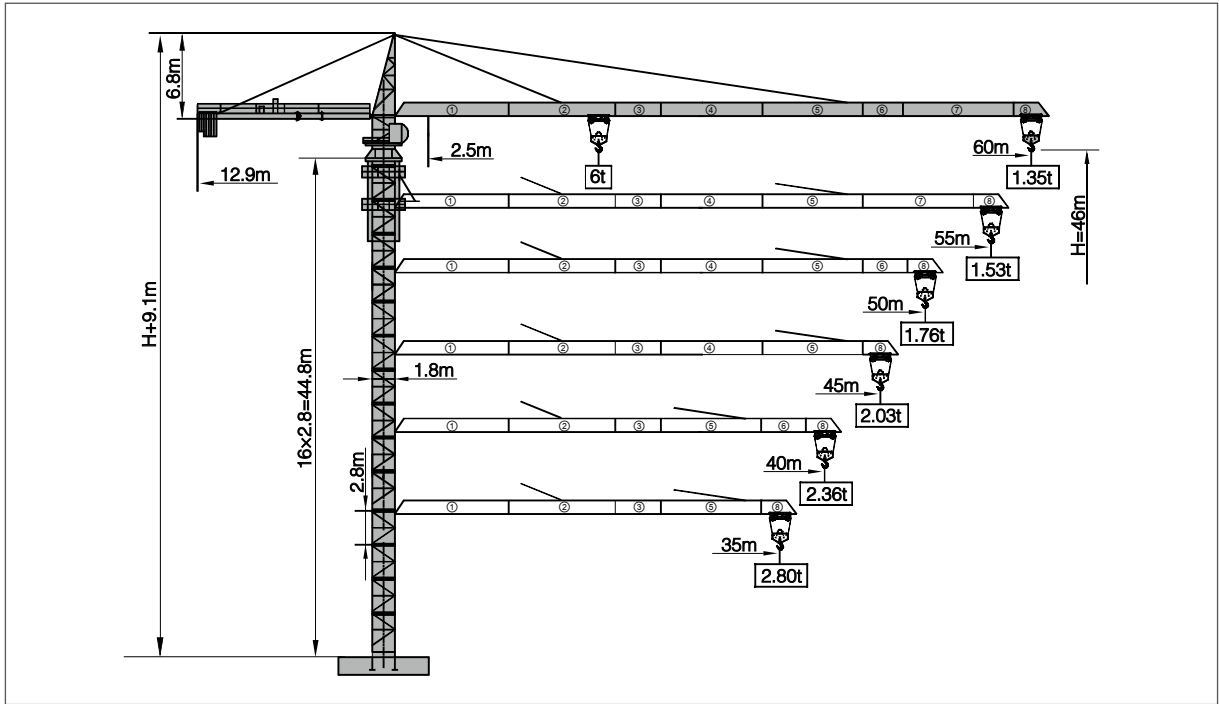


Counter-jib Ballast

Boom length (m)	Balance jib length(m)	Total weight of counterweight (kg)	2720kg counterweight (blocks)	1200kg counterweight (blocks)
60	12.9	17520	6	1
55	12.9	16320	6	0
50	12.9	14800	5	1
45	12.9	13600	5	0
40	12.9	10880	4	0
35	12.9	9360	3	1

Masts

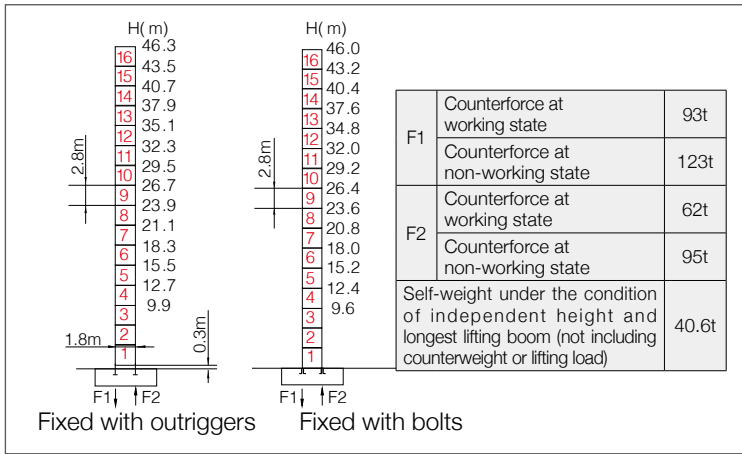

Anchorage

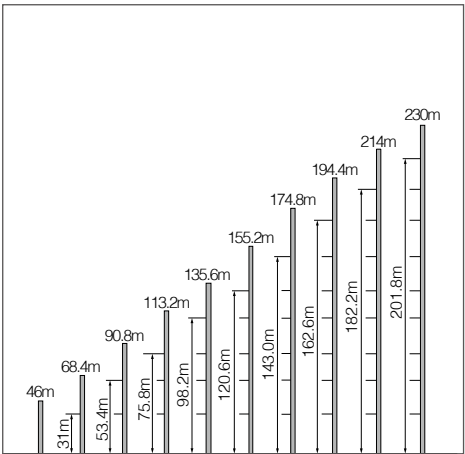


Load diagrams

Range	Max. lifting capacity	18	20	22	25	28	30	32	35	38
60m	2.5~32.8m/3t				3.00				2.77	2.50
	2.5~18.0m/6t	6.00	5.32	4.76	4.09	3.57	3.28	3.03	2.71	2.44
55m	2.5~32.9m/3t				3.00				2.78	2.51
	2.5~18.1m/6t	6.00	5.34	4.78	4.10	3.58	3.29	3.04	2.71	2.44
50m	2.5~33.0m/3t				3.00				2.79	2.51
	2.5~18.1m/6t	6.00	5.35	4.79	4.11	3.59	3.30	3.04	2.72	2.44
45m	2.5~33.0m/3t				3.00				2.79	2.52
	2.5~18.2m/6t	6.00	5.36	4.80	4.12	3.59	3.30	3.05	2.72	2.45
40m	2.5~33.0m/3t				3.00				2.79	2.52
	2.5~18.2m/6t	6.00	5.36	4.80	4.12	3.59	3.30	3.05	2.72	2.45
35m	2.5~33.1m/3t				3.00				2.80	
	2.5~18.2m/6t	6.00	5.38	4.81	4.13	3.60	3.31	3.05	2.73	

Range	Max. lifting capacity	40	42	45	48	50	52	55	58	60
60m	2.5~32.8m/3t	2.34	2.20	2.01	1.84	1.74	1.65	1.53	1.42	1.35
	2.5~18.0m/6t	2.28	2.14	1.95	1.78	1.68	1.59	1.47	1.36	1.29
55m	2.5~32.9m/3t	2.35	2.21	2.02	1.85	1.75	1.66	1.53		
	2.5~18.1m/6t	2.28	2.14	1.95	1.78	1.68	1.59	1.46		
50m	2.5~33.0m/3t	2.36	2.21	2.02	1.85	1.76				
	2.5~18.1m/6t	2.29	2.14	1.95	1.78	1.69				
45m	2.5~33.0m/3t	2.36	2.22	2.03						
	2.5~18.2m/6t	2.29	2.15	1.96						
40m	2.5~33.0m/3t	2.36								
	2.5~18.2m/6t	2.29								

Load Capacity Diagram

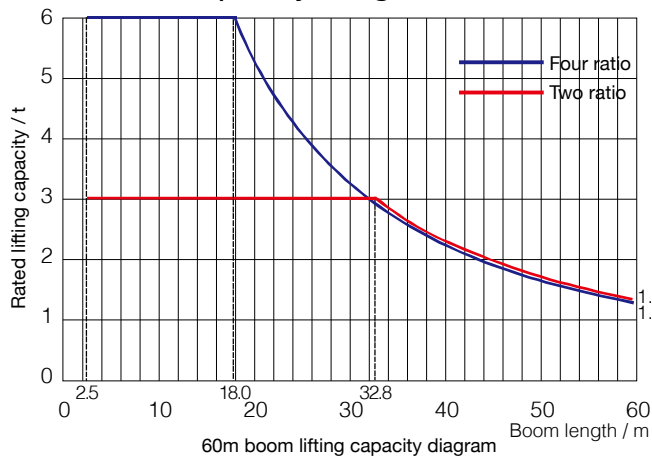

Mechanisms


		Model	Power	Speed
Slewing	⤵	SHJ100A	2×5.5kW	0~0.75r/min
Trolleying	↔	SXJ33.62P	4kW	0~50m/min
Lifting	⬆	SQJ03NP	25kW	0~80m/min
Power voltage		380V(±10%)	Power frequency	50Hz

Note: If working rope capacity is greater than 380m, please contact the manufacturer.

Integral Standard Section

SYT80 (T6510-6)


Jib Length & Tip Load

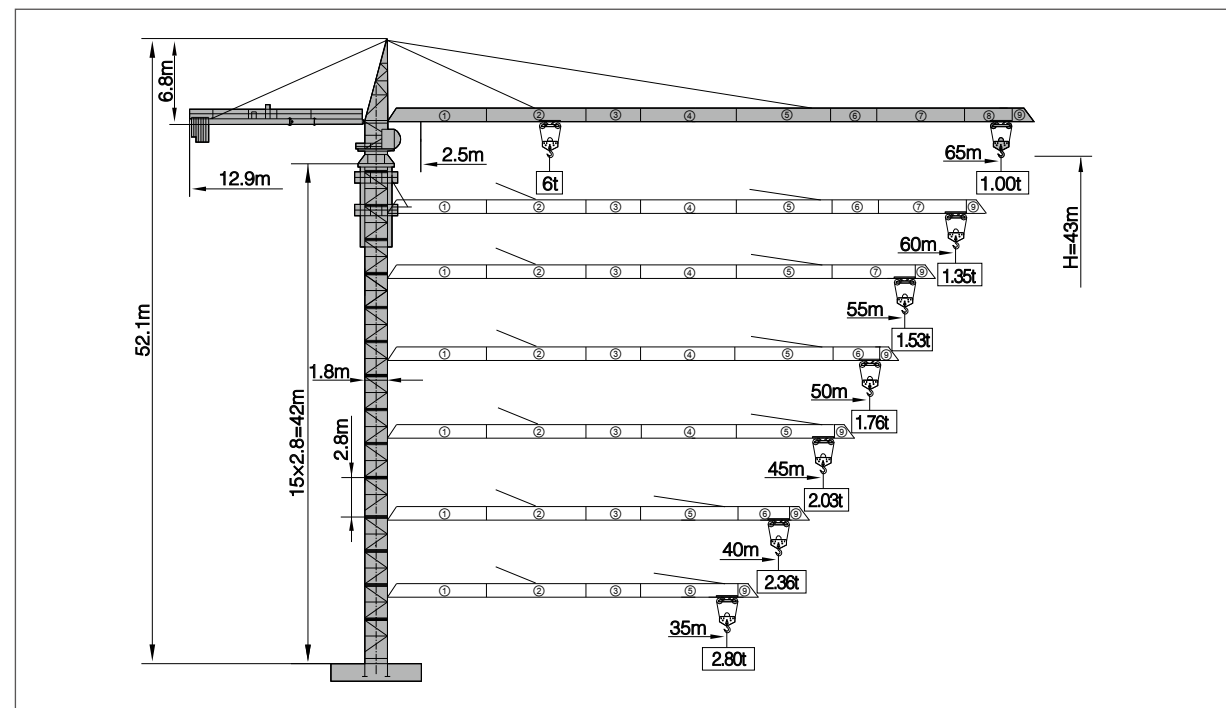


Counter-jib Ballast

Boom length (m)	Balance jib length(m)	Total weight of counterweight (kg)	2720kg counterweight (blocks)	1200kg counterweight (blocks)
65	12.9	19040	7	0
60	12.9	17520	6	1
55	12.9	16320	6	0
50	12.9	14800	5	1
45	12.9	13600	5	0
40	12.9	10880	4	0
35	12.9	9360	3	1

Masts

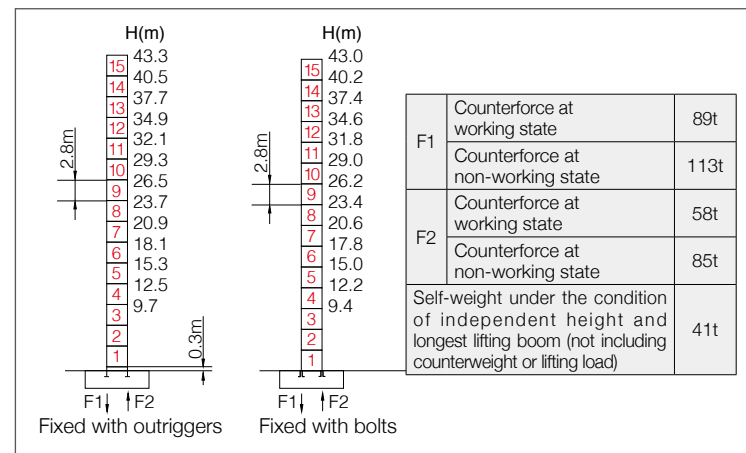

Anchorage

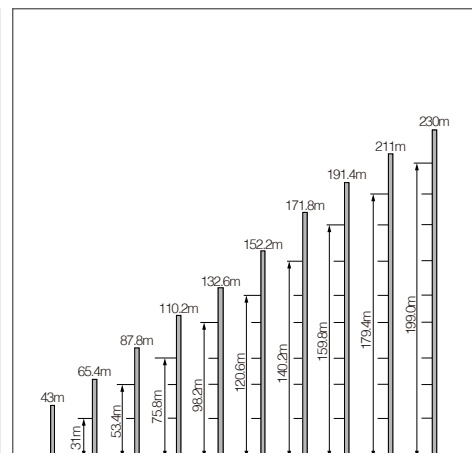


Load diagrams

Range	Max. lifting capacity	18	20	22	25	28	30	32	35	38	40
65m	2.5~29.3m/3t			3.00			2.91	2.69	2.40	2.16	2.02
	2.5~16.2m/6t	5.29	4.67	4.17	3.57	3.10	2.84	2.62	2.33	2.09	1.95
60m	2.5~32.8m/3t				3.00				2.77	2.50	2.34
	2.5~18.1m/6t	6.00	5.33	4.76	4.09	3.57	3.28	3.03	2.70	2.43	2.27
55m	2.5~32.9m/3t				3.00				2.78	2.51	2.35
	2.5~18.1m/6t	6.00	5.34	4.78	4.10	3.58	3.29	3.04	2.71	2.44	2.28
50m	2.5~33.0m/3t				3.00				2.79	2.51	2.36
	2.5~18.1m/6t	6.00	5.35	4.79	4.11	3.59	3.30	3.04	2.72	2.44	2.29
45m	2.5~33.0m/3t				3.00				2.79	2.52	2.36
	2.5~18.2m/6t	6.00	5.36	4.80	4.12	3.59	3.30	3.05	2.72	2.45	2.29
40m	2.5~33.0m/3t				3.00				2.79	2.52	2.36
	2.5~18.2m/6t	6.00	5.36	4.80	4.12	3.59	3.30	3.05	2.72	2.45	2.29
35m	2.5~33.1m/3t				3.00				2.80		
	2.5~18.2m/6t	6.00	5.38	4.81	4.13	3.60	3.31	3.05	2.73		

Range	Max. lifting capacity	42	45	48	50	52	55	58	60	63	65
65m	2.5 ~ 29.3m/3t	1.89	1.72	1.58	1.49	1.41	1.29	1.20	1.13	1.05	1.00
	2.5 ~ 16.2m/6t	1.82	1.65	1.51	1.42	1.34	1.22	1.13	1.06	0.98	0.93
60m	2.5 ~ 32.8m/3t	2.20	2.01	1.84	1.74	1.65	1.53	1.42	1.35		
	2.5 ~ 18.1m/6t	2.13	1.94	1.77	1.67	1.58	1.46	1.35	1.28		
55m	2.5 ~ 32.9m/3t	2.21	2.02	1.85	1.75	1.66	1.53				
	2.5 ~ 18.1m/6t	2.14	1.95	1.78	1.68	1.59	1.46				
50m	2.5 ~ 33.0m/3t	2.21	2.02	1.85	1.76						
	2.5 ~ 18.1m/6t	2.14	1.95	1.78	1.69						
45m	2.5 ~ 33.0m/3t	2.22	2.03								
	2.5 ~ 18.2m/6t	2.15	1.96								

Load Capacity Diagram

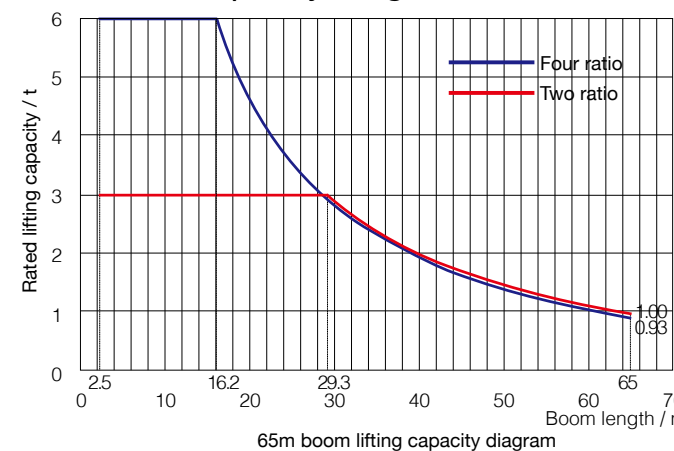

Mechanisms


		Model	Power	Speed
Slewing	↻	SHJ100A	2×5.5kW	0~0.75r/min
Trolleying	↔	SXJ33.62B	3.3/2.2kW	50/25m/min
Lifting	↑↓	SQJ03N	24/24/5.4 kW	1.5t 80m/min 3t 40m/min 3t 8.8m/min 3t 40m/min 6t 20m/min 6t 4.4m/min
Power voltage		380V(±10%)	Power frequency	50Hz

Note: If working rope capacity is greater than 380m, please contact the manufacturer.

Integral Standard Section

SYT80 (T6510-6W)


Jib Length & Tip Load

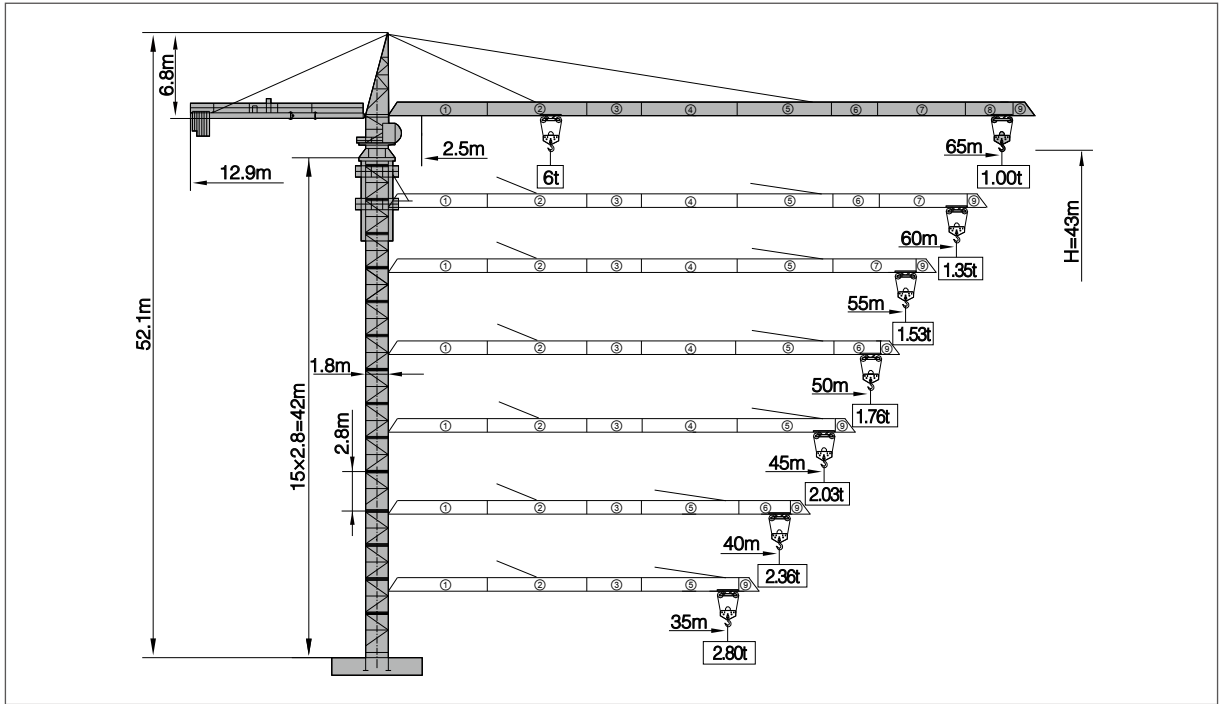


Counter-jib Ballast

Boom length (m)	Balance jib length(m)	Total weight of counterweight (kg)	2720kg counterweight (blocks)	1200kg counterweight (blocks)
65	12.9	19040	7	0
60	12.9	17520	6	1
55	12.9	16320	6	0
50	12.9	14800	5	1
45	12.9	13600	5	0
40	12.9	10880	4	0
35	12.9	9360	3	1

Masts

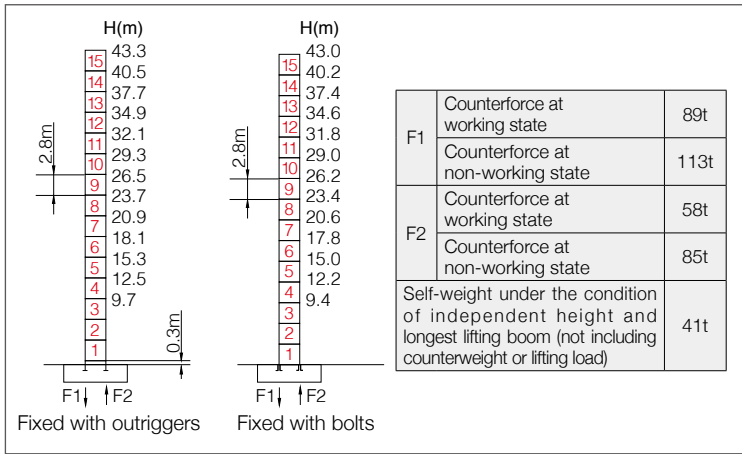

Anchorage

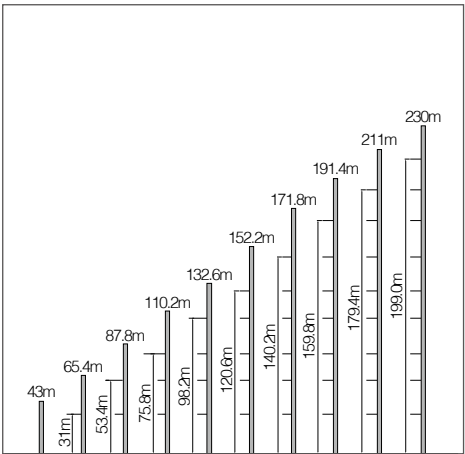


Load diagrams

Range	Max. lifting capacity	18	20	22	25	28	30	32	35	38	40
65m	2.5~29.3m/3t			3.00			2.91	2.69	2.40	2.16	2.02
	2.5~16.2m/6t	5.29	4.67	4.17	3.57	3.10	2.84	2.62	2.33	2.09	1.95
60m	2.5~32.8m/3t				3.00				2.77	2.50	2.34
	2.5~18.1m/6t	6.00	5.33	4.76	4.09	3.57	3.28	3.03	2.70	2.43	2.27
55m	2.5~32.9m/3t				3.00				2.78	2.51	2.35
	2.5~18.1m/6t	6.00	5.34	4.78	4.10	3.58	3.29	3.04	2.71	2.44	2.28
50m	2.5~33.0m/3t				3.00				2.79	2.51	2.36
	2.5~18.1m/6t	6.00	5.35	4.79	4.11	3.59	3.30	3.04	2.72	2.44	2.29
45m	2.5~33.0m/3t				3.00				2.79	2.52	2.36
	2.5~18.2m/6t	6.00	5.36	4.80	4.12	3.59	3.30	3.05	2.72	2.45	2.29
40m	2.5~33.0m/3t				3.00				2.79	2.52	2.36
	2.5~18.2m/6t	6.00	5.36	4.80	4.12	3.59	3.30	3.05	2.72	2.45	2.29
35m	2.5~33.1m/3t				3.00				2.80		
	2.5~18.2m/6t	6.00	5.38	4.81	4.13	3.60	3.31	3.05	2.73		

Range	Max. lifting capacity	42	45	48	50	52	55	58	60	63	65
65m	2.5 ~ 29.3m/3t	1.89	1.72	1.58	1.49	1.41	1.29	1.20	1.13	1.05	1.00
	2.5 ~ 16.2m/6t	1.82	1.65	1.51	1.42	1.34	1.22	1.13	1.06	0.98	0.93
60m	2.5 ~ 32.8m/3t	2.20	2.01	1.84	1.74	1.65	1.53	1.42	1.35		
	2.5 ~ 18.1m/6t	2.13	1.94	1.77	1.67	1.58	1.46	1.35	1.28		
55m	2.5 ~ 32.9m/3t	2.21	2.02	1.85	1.75	1.66	1.53				
	2.5 ~ 18.1m/6t	2.14	1.95	1.78	1.68	1.59	1.46				
50m	2.5 ~ 33.0m/3t	2.21	2.02	1.85	1.76						
	2.5 ~ 18.1m/6t	2.14	1.95	1.78	1.69						
45m	2.5 ~ 33.0m/3t	2.22	2.03								
	2.5 ~ 18.2m/6t	2.15	1.96								

Load Capacity Diagram

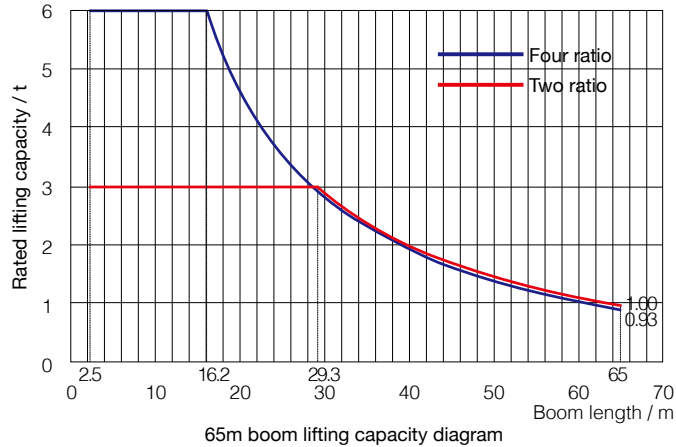

Mechanisms


		Model	Power	Speed
Slewing	↻	SHJ100A	2×5.5kW	0~0.75r/min
Trolleying	↔	SXJ33.62B	3.3/2.2kW	50/25m/min
Lifting	↑↓	SQJ03NR	24/24 kW	1.5t 80m/min 3t 40m/min 3t 40m/min 6t 20m/min
Power voltage		380V(±10%)	Power frequency	50Hz

Note: If working rope capacity is greater than 380m, please contact the manufacturer.

Integral Standard Section

SYT80 (T6510-8)


Jib Length & Tip Load

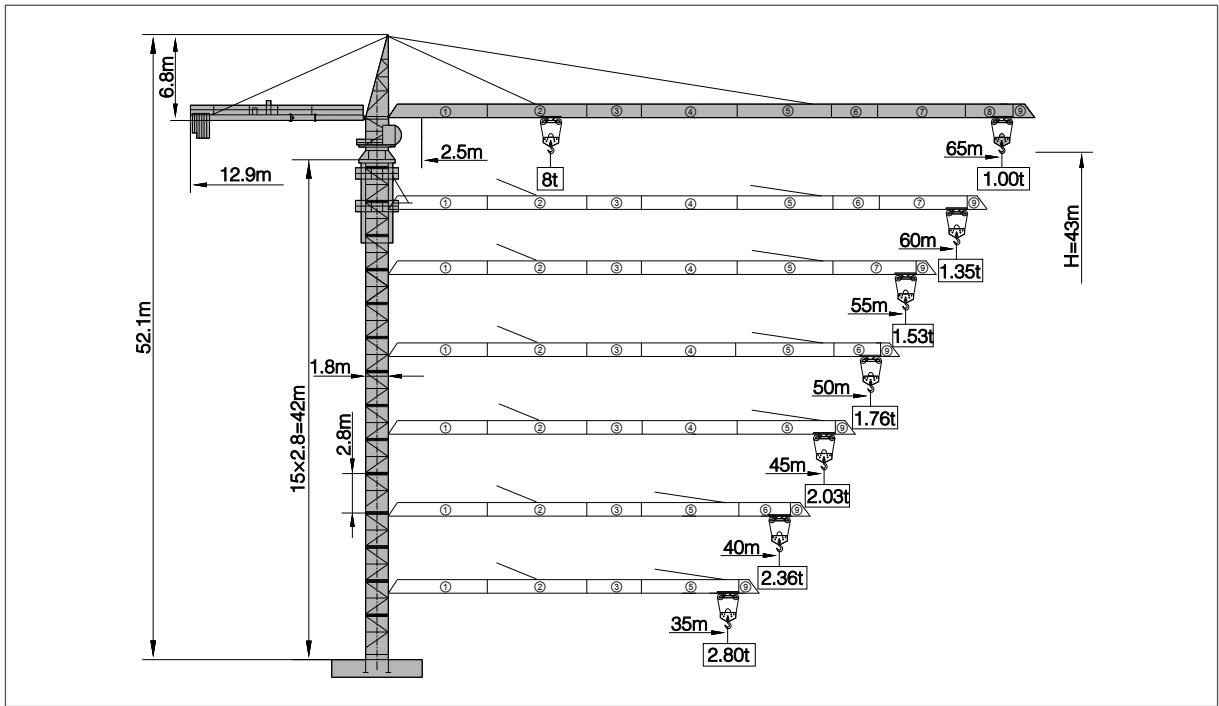


Counter-jib Ballast

Boom length (m)	Balance jib length(m)	Total weight of counterweight (kg)	2720kg counterweight (blocks)	1200kg counterweight (blocks)
65	12.9	19040	7	0
60	12.9	17520	6	1
55	12.9	16320	6	0
50	12.9	14800	5	1
45	12.9	13600	5	0
40	12.9	10880	4	0
35	12.9	9360	3	1

Masts

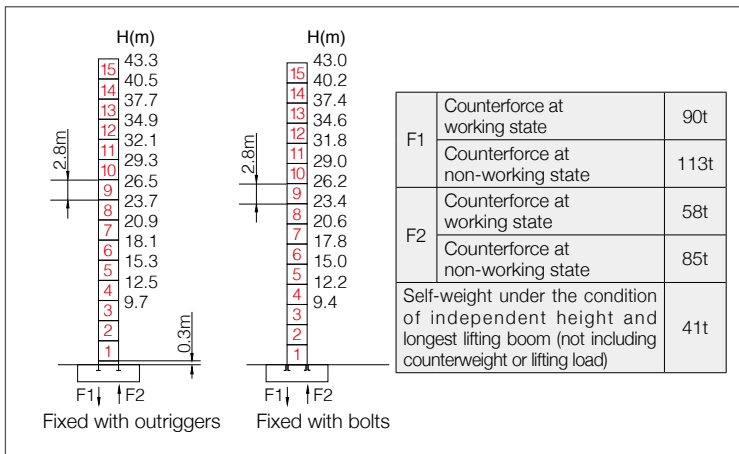

Anchorage

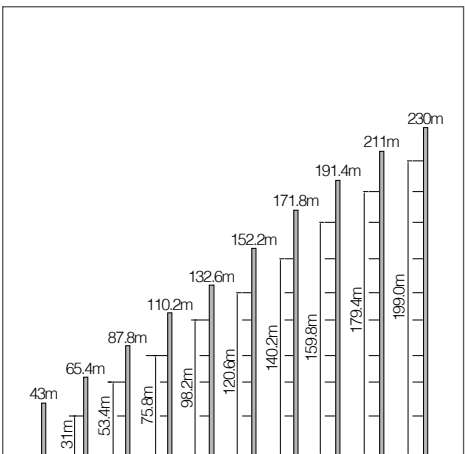


Load diagrams

Range	Max. lifting capacity	18	20	22	25	28	30	32	35	38	40
65m	2.5~23.1m/4t		4.00		3.64	3.17	2.91	2.69	2.40	2.16	2.02
	2.5~12.6m/8t	5.29	4.67	4.17	3.57	3.10	2.84	2.62	2.33	2.09	1.95
60m	2.5~25.9m/4t			4.00		3.64	3.35	3.10	2.77	2.50	2.34
	2.5~14.1m/8t	6.02	5.33	4.76	4.09	3.57	3.28	3.03	2.70	2.43	2.27
55m	2.5~25.9m/4t			4.00		3.65	3.36	3.11	2.78	2.51	2.35
	2.5~14.1m/8t	6.04	5.34	4.78	4.10	3.58	3.29	3.04	2.71	2.44	2.28
50m	2.5~26.0m/4t			4.00		3.66	3.37	3.11	2.79	2.51	2.36
	2.5~14.1m/8t	6.05	5.35	4.79	4.11	3.59	3.30	3.04	2.72	2.44	2.29
45m	2.5~26.0m/4t			4.00		3.66	3.37	3.12	2.79	2.52	2.36
	2.5~14.2m/8t	6.06	5.36	4.80	4.12	3.59	3.30	3.05	2.72	2.45	2.29
40m	2.5~26.0m/4t			4.00		3.66	3.37	3.12	2.79	2.52	2.36
	2.5~14.2m/8t	6.06	5.36	4.80	4.12	3.59	3.30	3.05	2.72	2.45	2.29
35m	2.5~26.1m/4t			4.00		3.67	3.38	3.12	2.80		
	2.5~14.2m/8t	6.08	5.38	4.81	4.13	3.60	3.31	3.05	2.73		

Range	Max. lifting capacity	42	45	48	50	52	55	58	60	63	65
65m	2.5~23.1m/4t	1.89	1.72	1.58	1.49	1.41	1.29	1.20	1.13	1.05	1.00
	2.5~12.6m/8t	1.82	1.65	1.51	1.42	1.34	1.22	1.13	1.06	0.98	0.93
60m	2.5~25.9m/4t	2.20	2.01	1.84	1.74	1.65	1.53	1.42	1.35		
	2.5~14.1m/8t	2.13	1.94	1.77	1.67	1.58	1.46	1.35	1.28		
55m	2.5~25.9m/4t	2.21	2.02	1.85	1.75	1.66	1.53				
	2.5~14.1m/8t	2.14	1.95	1.78	1.68	1.59	1.46				
50m	2.5~26.0m/4t	2.21	2.02	1.85	1.76						
	2.5~14.1m/8t	2.14	1.95	1.78	1.69						
45m	2.5~26.0m/4t	2.22	2.03								
	2.5~14.2m/8t	2.15	1.96								

Load Capacity Diagram

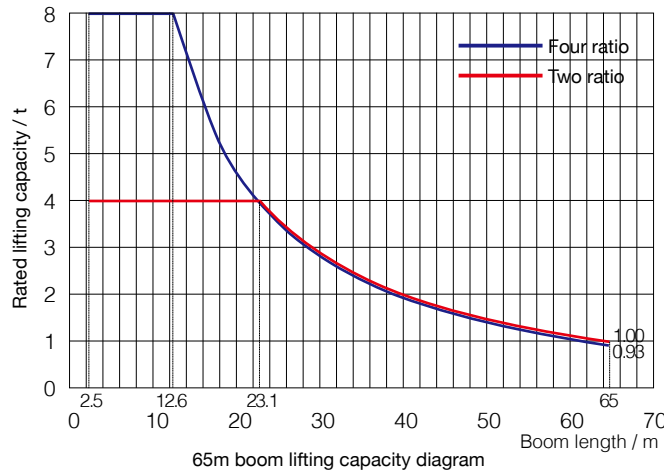

Mechanisms


		Model	Power	Speed
Slewing	↻	SHJ100A	2x5.5kW	0~0.75r/min
Trolleying	↔	SXJ33.62B	3.3/2.2kW	50/25m/min
Lifting	↑↓	SQJ04D	37/37kW	2t 100m/min 4t 50m/min 4t 50m/min 8t 25m/min
Power voltage		380V(±10%)	Power frequency	50Hz

Note: If working rope capacity is greater than 500m, please contact the manufacturer.

Integral Standard Section

SYT100 (T6515-6)


Jib Length & Tip Load

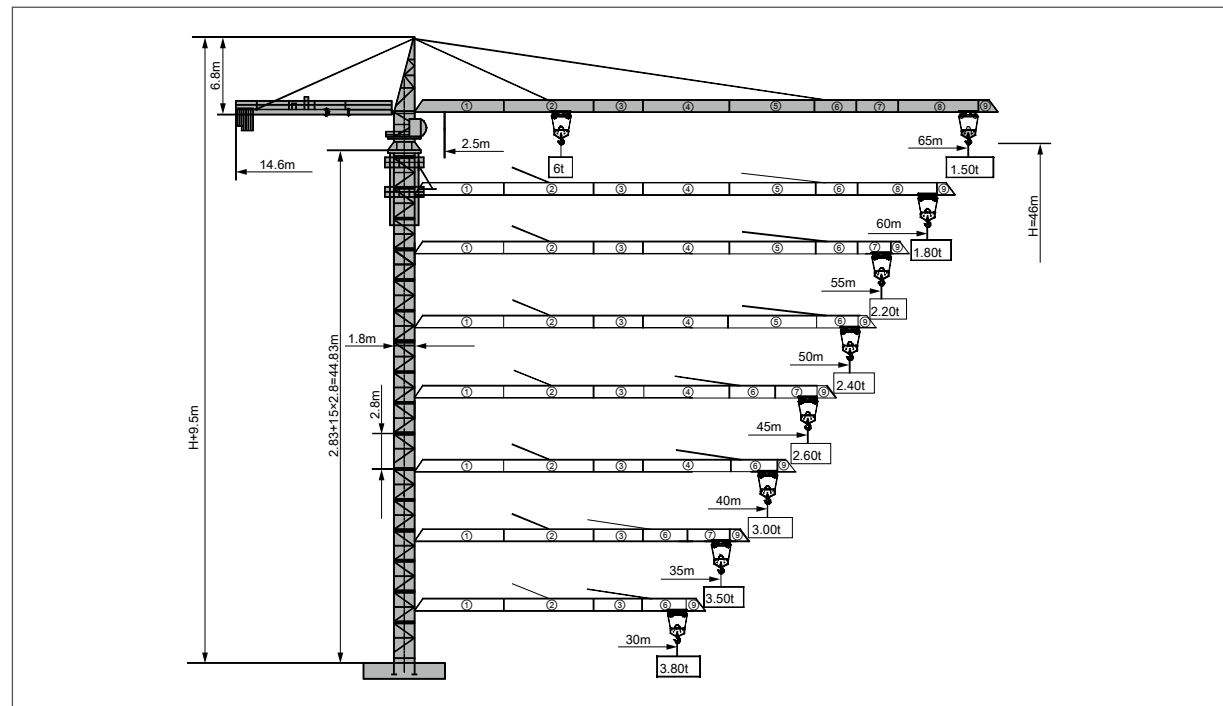


Counter-jib Ballast

Boom length (m)	Balance jib length(m)	Total weight of counterweight (kg)	2650kg counterweight (blocks)	1750kg counterweight (blocks)
65	14.6	18500	5	3
60	14.6	16750	5	2
55	14.6	15850	4	3
50	14.6	14100	4	2
45	14.6	11450	3	2
40	14.6	10600	4	0
35	14.6	8800	2	2
30	14.6	7050	2	1

Masts

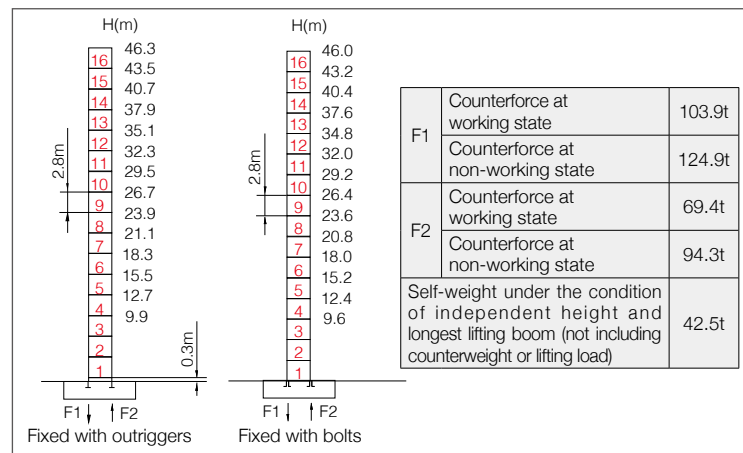

Anchorage

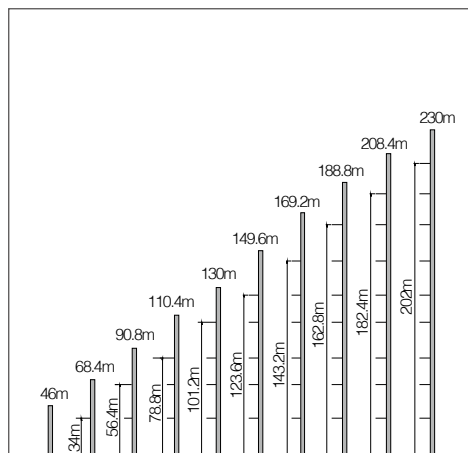


Load diagrams

Range	Max. lifting capacity	18	20	22	25	28	30	32	35	38	40
65m	2.5~38.32m/3t					3.00					2.85
	2.5~21.13m/6t	6.00		5.72	4.93	4.31	3.97	3.67	3.29	2.97	2.79
60m	2.5~40.32m/3t					4.00					
	2.5~22.21m/6t	6.00			5.23	4.58	4.22	3.90	3.50	3.17	2.97
55m	2.5~42.99m/3t					4.00					
	2.5~23.65m/6t	6.00			5.63	4.93	4.55	4.21	3.78	3.42	3.22
50m	2.5~41.82m/3t					3.00					
	2.5~23.02m/6t	6.00			5.45	4.78	4.40	4.08	3.66	3.31	3.11
45m	2.5~40.10m/3t					3.00					
	2.5~22.09m/6t	6.00			5.20	4.55	4.19	3.88	3.48	3.14	2.95
40m	2.5~40.00m/3t					3.00					
	2.5~23.27m/6t	6.00			5.28	4.62	4.26	3.94	3.54	3.20	3.00
35m	2.5~35.00m/3t					3.00					
	2.5~22.71m/6t	6.00			5.23	4.57	4.21	3.90	3.50		
30m	2.5~30.00m/3t					3.00					
	2.5~20.38m/6t	6.00		5.49	4.73	4.13	3.80				

Range	Max. lifting capacity	42	45	48	50	52	55	58	60	63	65
65m	2.5~38.32m/3t	2.68	2.45	2.26	2.14	2.04	1.89	1.76	1.68	1.57	1.50
	2.5~21.13m/6t	2.62	2.39	2.20	2.08	1.98	1.83	1.70	1.62	1.51	1.44
60m	2.5~40.32m/3t	2.85	2.62	2.41	2.29	2.18	2.02	1.88	1.80		
	2.5~22.21m/6t	2.79	2.56	2.35	2.23	2.12	1.96	1.82	1.74		
55m	2.5~42.99m/3t	3.00	2.84	2.62	2.49	2.36	2.20				
	2.5~23.65m/6t	3.03	2.78	2.56	2.43	2.30	2.14				
50m	2.5~41.82m/3t	2.98	2.74	2.53	2.40						
	2.5~23.02m/6t	2.92	2.68	2.47	2.34						
45m	2.5~40.10m/3t	2.83	2.60								
	2.5~22.09m/6t	2.77	2.54								

Load Capacity Diagram

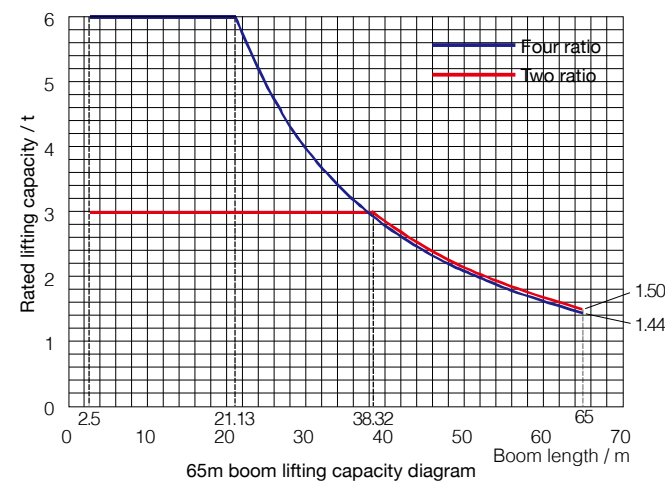

Mechanisms


		Model	Power	Speed
Slewing	↻	SHJ100A	2×5.5kW	0~0.8r/min
Trolleying	↔	SXJ33.62P	4kW	0~55m/min
Lifting	↑↓	SQJ03NR	24/24kW	1.5t 80m/min 3t 40m/min 3t 40m/min 6t 20m/min
Power voltage		380V(±10%)	Power frequency	50Hz

Note: If working rope capacity is greater than 380m, please contact the manufacturer.

Integral Standard Section

SYT125 (T6515-8)


Jib Length & Tip Load

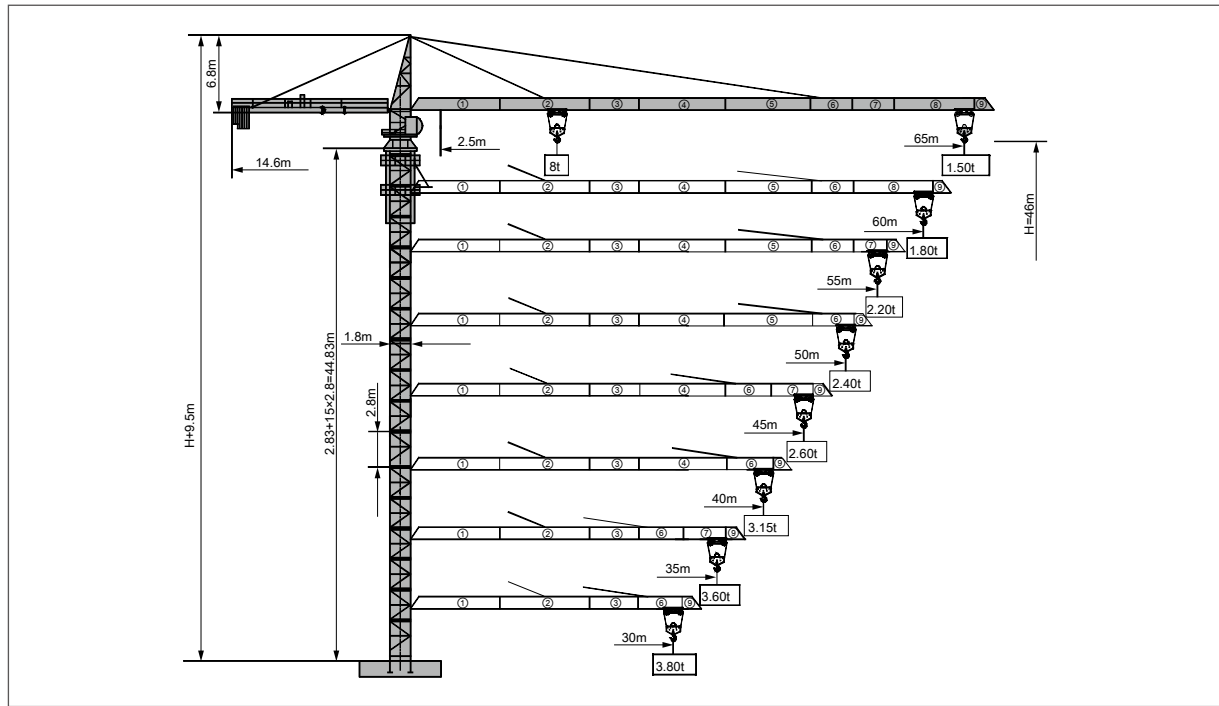


Counter-jib Ballast

Boom length (m)	Balance jib length(m)	Total weight of counterweight (kg)	2650kg counterweight (blocks)	1750kg counterweight (blocks)
65	14.6	18500	5	3
60	14.6	16750	5	2
55	14.6	15850	4	3
50	14.6	14100	4	2
45	14.6	11450	3	2
40	14.6	10600	4	0
35	14.6	8800	2	2
30	14.6	7050	2	1

Masts

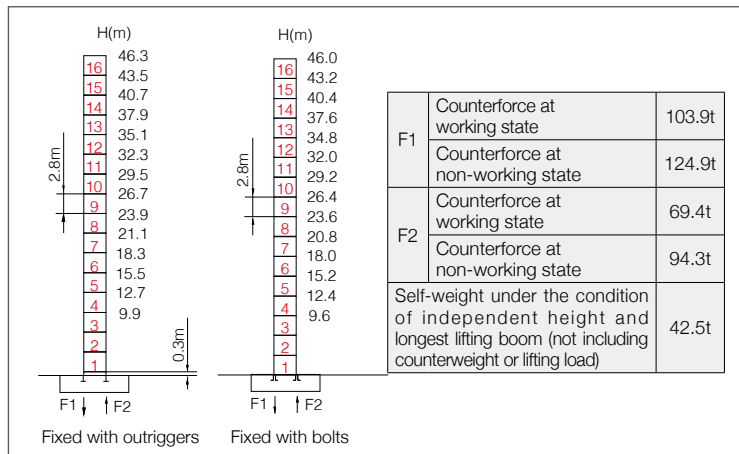

Anchorage

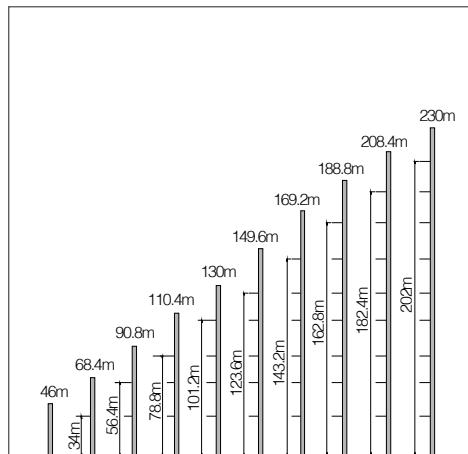


Load diagrams

Range	Max. lifting capacity	18	20	22	25	28	30	32	35	38	40
65m	2.5~29.5m/4t			4.00			3.92	3.68	3.33	3.04	2.86
	2.5~15.2m/8t	7.00	6.25	5.60	4.85	4.22	3.85	3.60	3.25	2.96	2.78
60m	2.5~31.9m/4t			4.00				3.98	3.58	3.24	3.04
	2.5~17.35m/8t	7.67	6.79	6.08	5.24	4.58	4.22	3.90	3.50	3.16	2.96
55m	2.5~33.95m/4t				4.00				3.86	3.50	3.28
	2.5~18.44m/8t	8.00	7.29	6.53	5.63	4.93	4.54	4.21	3.77	3.41	3.20
50m	2.5~33.02m/4t				4.00				3.73	3.38	3.17
	2.5~17.95m/8t	7.97	7.07	6.33	5.45	4.77	4.40	4.07	3.65	3.30	3.09
45m	2.5~31.65m/4t			4.00				3.95	3.55	3.21	3.01
	2.5~17.22m/8t	7.61	6.74	6.03	5.19	4.54	4.18	3.87	3.46	3.13	2.93
40m	2.5~32.81m/4t				4.00				3.70	3.35	3.15
	2.5~17.84m/8t	7.92	7.02	6.29	5.42	4.74	4.36	4.04	3.62	3.27	3.07
35m	2.5~32.07m/4t				4.00				3.60		
	2.5~17.45m/8t	7.72	6.84	6.12	5.27	4.61	4.25	3.93	3.52		
30m	2.5~28.76m/4t			4.00			3.80				
	2.5~15.69m/8t	6.82	6.04	5.40	4.64	4.05	3.72				

Range	Max. lifting capacity	42	45	48	50	52	55	58	60	63	65
65m	2.5~29.5m/4t	2.69	2.46	2.26	2.15	2.04	1.89	1.76	1.68	1.57	1.50
	2.5~15.2m/8t	2.61	2.38	2.18	2.07	1.96	1.81	1.68	1.60	1.49	1.42
60m	2.5~31.9m/4t	2.86	2.63	2.42	2.29	2.18	2.02	1.89	1.80		
	2.5~17.35m/8t	2.78	2.54	2.34	2.21	2.10	1.94	1.80	1.72		
55m	2.5~33.95m/4t	3.09	2.84	2.62	2.49	2.37	2.20				
	2.5~18.44m/8t	3.01	2.76	2.54	2.40	2.28	2.12				
50m	2.5~33.02m/4t	2.99	2.74	2.53	2.40						
	2.5~17.95m/8t	2.91	2.66	2.45	2.32						
45m	2.5~31.65m/4t	2.84	2.60								
	2.5~17.22m/8t	2.75	2.52								

Load Capacity Diagram

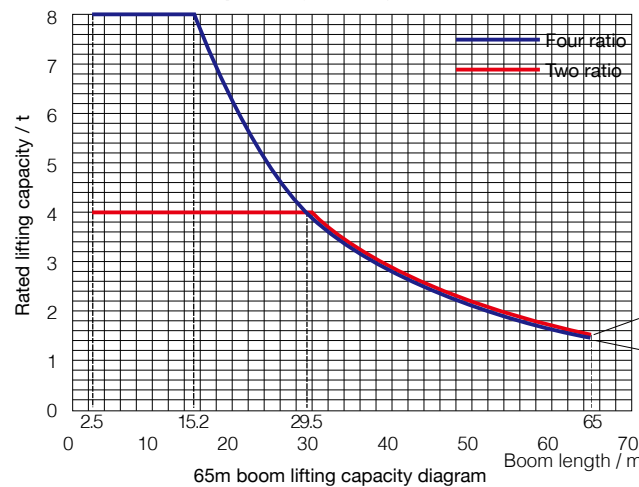

Mechanisms


		Model	Power	Speed
Slewing	↻	SHJ100A	2×5.5kW	0~0.8r/min
Trolleying	↔	SXJ33.62P	4kW	0~55m/min
Lifting	↑↓	SQJ04D	37/37kW	2t 100m/min 4t 50m/min 4t 50m/min 8t 25m/min
Power voltage		380V(±10%)	Power frequency	50Hz

Note: If working rope capacity is greater than 500m, please contact the manufacturer.

Non-integral Standard Section

SYT160 (T7015-10)


Jib Length & Tip Load

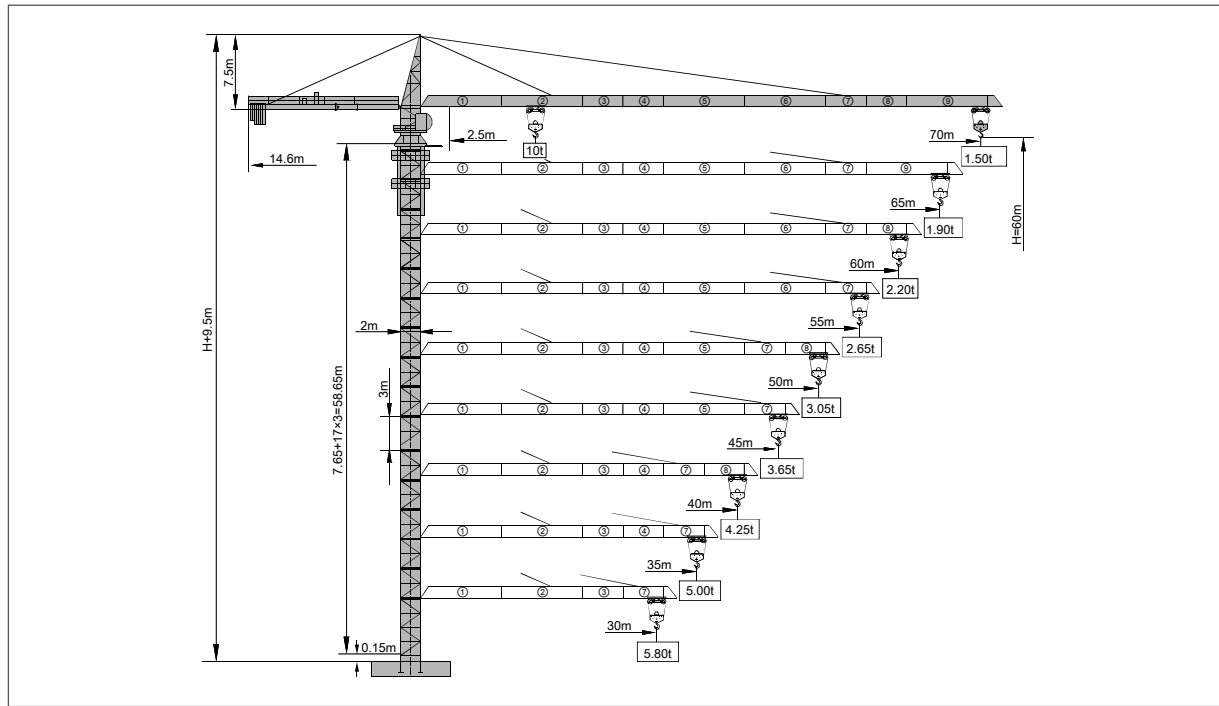


Counter-jib Ballast

Boom length (m)	Balance jib length(m)	Total weight of counterweight (kg)	3200kg counterweight (blocks)	2650kg counterweight (blocks)	1750kg counterweight (blocks)
70	14.6	23050	5	2	1
65	14.6	21300	5	2	0
60	14.6	20400	5	1	1
55	14.6	19850	4	2	1
50	14.6	17200	4	1	1
45	14.6	16000	5	0	0
40	14.6	13450	2	2	1
35	14.6	12800	4	0	0
30	14.6	10250	1	2	1

Masts

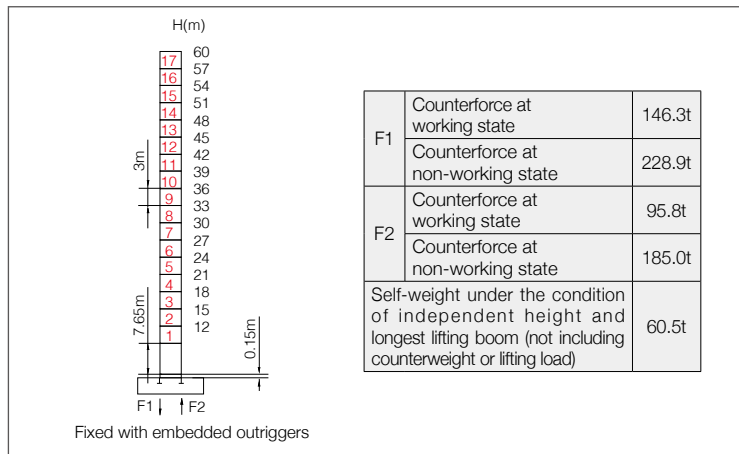

Anchorage

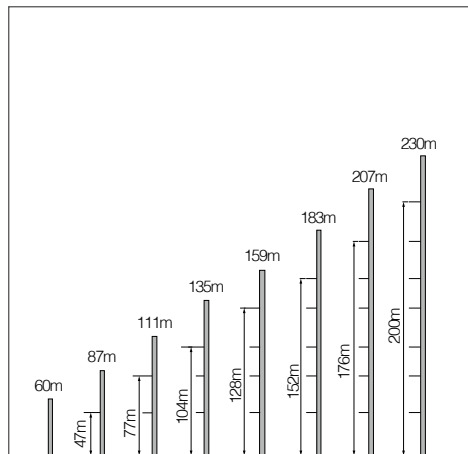


Load diagrams

Range	Max. lifting capacity	18	20	22	25	28	30	32	35	38	40	42
70m	2.5~28.2m/5t			5.00			4.64	4.29	3.84	3.47	3.25	3.06
	2.5~15.3m/10t	8.30	7.33	6.55	5.62	4.90	4.50	4.15	3.70	3.33	3.11	2.91
65m	2.5~30.6m/5t			5.00				4.75	4.26	3.85	3.62	3.40
	2.5~16.6m/10t	9.13	8.08	7.22	6.21	5.42	4.99	4.61	4.12	3.71	3.47	3.26
60m	2.5~31.4m/5t			5.00				4.89	4.39	3.97	3.73	3.51
	2.5~17.0m/10t	9.38	8.30	7.43	6.39	5.58	5.13	4.74	4.25	3.83	3.58	3.37
55m	2.5~33.0m/5t				5.00				4.66	4.22	3.97	3.74
	2.5~17.9m/10t	9.93	8.79	7.87	6.78	5.93	5.46	5.05	4.52	4.08	3.83	3.59
50m	2.5~33.4m/5t				5.00				4.74	4.29	4.03	3.80
	2.5~18.1m/10t	10.00	8.92	7.99	6.88	6.02	5.54	5.13	4.59	4.15	3.89	3.65
45m	2.5~34.7m/5t				5.00				4.95	4.49	4.22	3.97
	2.5~18.8m/10t	10.00	9.30	8.34	7.18	6.29	5.79	5.36	4.81	4.34	4.08	3.83
40m	2.5~34.9m/5t				5.00				4.99	4.52	4.25	
	2.5~18.9m/10t	10.00	9.37	8.40	7.24	6.34	5.84	5.40	4.85	4.38	4.11	
35m	2.5~35.0m/5t				5.00							
	2.5~19.4m/10t	10.00	9.65	8.65	7.46	6.53	6.02	5.57	5.00			
30m	2.5~30.0m/5t				5.00							
	2.5~18.8m/10t	10.00	9.32	8.35	7.19	6.30	5.80					

Range	Max. lifting capacity	45	48	50	52	55	58	60	63	65	68	70
70m	2.5~28.2m/5t	2.80	2.57	2.43	2.30	2.13	1.98	1.89	1.76	1.68	1.57	1.50
	2.5~15.3 m/10t	2.65	2.43	2.29	2.16	1.99	1.84	1.75	1.62	1.54	1.43	1.36
65m	2.5~30.6m/5t	3.12	2.87	2.72	2.58	2.40	2.23	2.13	1.99	1.90		
	2.5~16.6m/10t	2.98	2.73	2.58	2.44	2.25	2.09	1.99	1.84	1.76		
60m	2.5~31.4m/5t	3.22	2.96	2.81	2.67	2.48	2.30	2.20				
	2.5~17.0m/10t	3.07	2.82	2.67	2.53	2.33	2.16	2.06				
55m	2.5~33.0m/5t	3.43	3.16	3.00	2.85	2.65						
	2.5~17.9m/10t	3.29	3.02	2.86	2.71	2.51						
50m	2.5~33.4m/5t	3.48	3.21	3.05								
	2.5~18.1m/10t	3.34	3.07	2.91								
45m	2.5~34.7m/5t	3.65										
	2.5~18.8m/10t	3.51										

Load Capacity Diagram

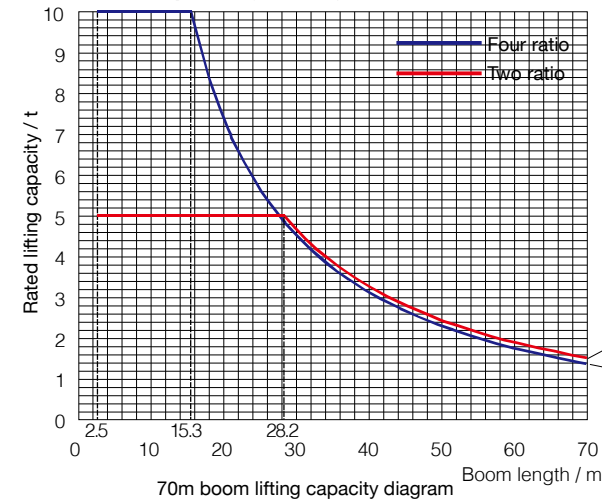

Mechanisms

		Model	Power	Speed
Slewing	↻	SHJ100A7.5P	2×7.5kW	0~0.8r/min
Trolleying	↔	SXJ55.70P	5.5kW	0~55m/min
Lifting	↑↓	SQJ05P	55kW	2.5t 0~100m/min 5t 0~50m/min 5t 0~50m/min 10t 0~25m/min
Power voltage		380V(±10%)	Power frequency	50Hz

Note: If working rope capacity is greater than 540m, please contact the manufacturer.

QUALITY CHANGES THE WORLD



SANY HEAVY INDUSTRY CO.,LTD.

Address: SANY Industrial Park, Jinzhou Development Zone, Changsha, Hunan, China
Service Hotline: +0086-4006-098-318
Tel: +86(0)731-84031058
Email: Liubiao@sany.com.cn
For more information, please visit: www.sanygroup.com

For our consistent improvement in technology, specifications may change without notice.
The machines illustrated may show optional equipment which can be supplied at additional cost.

Distributed By: